

Nec NP-P554W

NEC NP-P554W



The Nec model NP-P554W is an LCD projector with WXGA 1280 x 800 resolution and a contrast of 20000:1. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. Including an integrated media player with which files can be played directly. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 753 cm is possible as the projector has 5500 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 502 cm is recommended. The model is also Full HD 1080P compatible. The model was built by Nec in 2017 and is no longer current.

 3 x 0,64" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector	5500	Screen	2200 Lux (bei 200 cm Screen)
Contrast	20000:1 full on/off	Screen	20000:1 full on/off
Black Level	0,2750 min. Lumen	Screen	0,11 min. Lumen

Lens shift Vert.: +55% -0% Hori.: +/-15%

Resolution WXGA 1280 x 800

1.024.000 Pixel

WUXGA 1920 x 1200 compressed

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: .JPEGs

Application Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source 330W Lamp

Articel Nr.: NP44LP

Light Life 4000 h. / 8000 h. in Eco Mode

Operating Costs 14,29% / 0,06 €

Focus Manual

Zoom Manual 1,6

Objective F=1,7-2,2 f=17,4-29,0 mm

Throw Ratio 1,2-2,1:1

Audio 20W Mono

Connections 2 x HDMI in
D-sub 15 pin in und out

Cinch Video in

Cinch Stereo in

USB Typ A & B

RS232C Din 9 pin in

Mini Jack Audio in und out

RJ45 in

HD Base T


Ceiling Mounting Yes

Power 448W/ 280W in Eco Mode

Size WxHxD 420 x 141 x 329 mm (16,5"x5,6"x13") 19,48 L/dm³


Operating Noise 37 / 34 dB in Eco Mode

Weight 4,80 kg / 10,58 lbs.

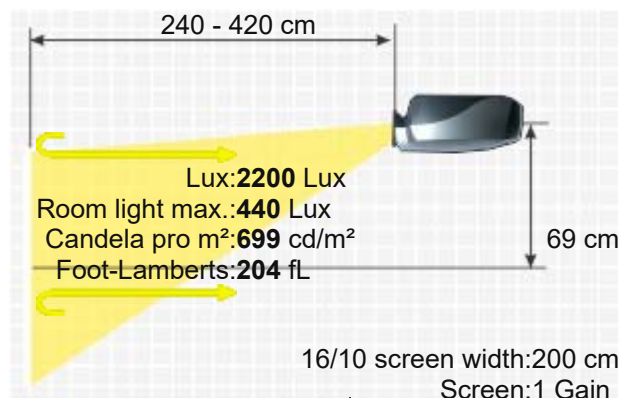

Keystone	Vert.: +/-30°		
Illumination	-		
Frequenz	H-sync: 15-100 kHz V-sync: 50-120 Hz		
Foot-Lamberts	204 fL / max. 753 cm screen width 699 cd/m²		
Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Integrated Mediaplayer ■ Freeze ■ Blackboard Modus ■ Eco Mode ■ Kensington Slot ■ Optional Wi-Fi network compatible. ■ Lan network compatible. ■ Crestron®-Software compatible. ■		
	Air filter compatible	NP44LP-Filter	
	Lamp original	NP44LP / 100014748	
	Remote control original	Alternative zu:7N900921 / 7N900927 / RD-448E	
	Cable Cover original	100014749 / NP12CV	
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=fik24270		
	2017 Discontinued (EOL) // Last update of the data: 2023-08-04		
	Created: 2017-08-13 15:42:11		
	Optional		
	Status		

Data



More Details



HCinema

<https://www.projector-database.com/pro/necnpp554W-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.