

Optoma ZW403

EAN/UPC:796435 44 464 8

OPTOMA ZW403



A brief introduction to the Optoma ZW403. The standard portable DLP laser projector has a WXGA 1280 x 800 resolution and a contrast of 1800:1. Thanks to the laser technology, the projector has a light life of up to 20000 hours, which converts to over 13.7 years at 4 hours per day. 4500 Ansi lumens ensure that a picture width of 682 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 455 cm. Furthermore, it is Full HD 1080P compatible and even has the option of projecting HD 1080P Blu-rays onto the ceiling thanks to 360° projection. The model was built by Optoma in 2019 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,65" DMD DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 4500

Screen 1800 Lux (bei 200 cm Screen)

Contrast

1800:1 full on/off

Screen 1800:1 full on/off

Black Level

2,5000 min. Lumen

Screen 1,001 min. Lumen

Offset

Resolution

WXGA 1280 x 800
1.024.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

3D Compatibility

Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

Laser

Articel Nr.: BR-3075W /
45.79P01G001A

Light Life

20000 h. 30000 h. in Eco Mode

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual 1,3

Objective

F=2,43-2,78 f=16,9-21,60 mm

Throw Ratio

1,19-1,54:1

Audio

10W

Connections

2 x HDMI in
D-sub 15pin in
Mini Jack Audio in und out



USB in
RS232C Din 9 pin in
RJ45 in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
219W / 162W in Eco Mode
336,8 x 121,9 x 266,7 mm (13,26"x4,8"x10,5") 0 L/dm³
32dB

Weight
Keystone
Illumination

4,26 kg / 9,39 lbs.
Vert.: +/-30°
-

Frequenz

H-sync: 15,37-91,1 kHz
V-sync: 24-120 Hz

Foot-Lamberts

167 fL / max. 682 cm screen width
572 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- 360° installable
- Password protection
- Optional Wi-Fi network compatible.
- Lan network compatible.

Features


Remote control original BR-3075W / 45.79P01G001A

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002169>

Status

2019 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2019-12-30 13:52:27

Data

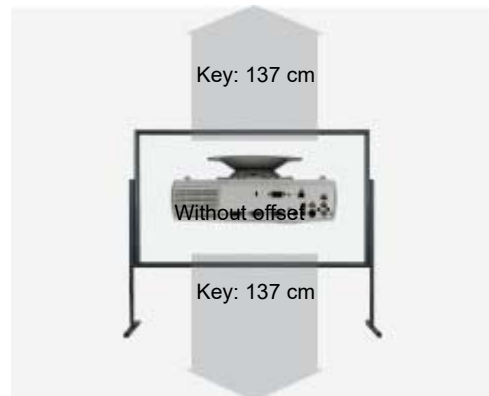

More Details



HCinema

<https://www.projector-database.com/pro/optomazw403-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.