

Panasonic PT-JW130GWE / GBE

PANASONIC PT-JW130GWE / GBE



Brief Introduction

Beta 2.5

A brief introduction to the Panasonic PT-JW130GWE / GBE. The standard portable DLP laser projector has a WXGA 1280 x 800 resolution and a contrast of 1000:1. Due to the laser technology, the projector has a light life of up to 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. The projector also offers an integrated media player that can be used to play files directly. Horizontal and vertical keystone correction makes image adjustment childs play. A picture width of up to 321 cm is possible as the projector has 1000 Ansi lumens. However, if room light is available, the picture should be max. 214 cm wide. Even 1080P video signals are no problem for the projector, which can even project Blu-rays onto the ceiling thanks to 360° projection. The model was built by Panasonic in 2016 and is no longer current.



1 x DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

1000

1000:1 full on/off

1,0000 min. Lumen

WXGA 1280 x 800

1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: H.264/MPEG-4 AVC JPEG Motion JPEG H.264/MPEG-4 AVC Motion JPEG MPEG-4 H.264/MPEG-4 AVC Motion MPEG-4 MPEG-2 WMV9 AAC Linear PCM MPEG-1/2 Audio Layer-3 (MP3) AAC Linear PCM AAC MPEG-4 AAC-LC MPEG-1/2 Audio Layer-2 WMA

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Laser Diode

20000 h.

0,00 € Laser

Manual

Manual 2,2

F=2,0-2,7 f=15,2-32,7 mm


1,5-3,3:1

-

400 Lux (bei 200 cm Screen)

1000:1 full on/off

0,401 min. Lumen

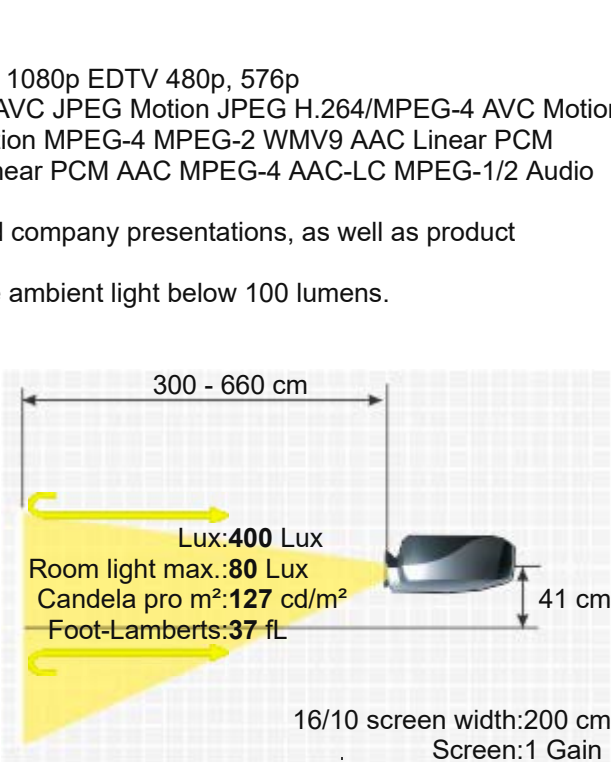


Connections	HDMI in Mini Jack Audio out USB Typ A in RJ45 in SD card slot
Ceiling Mounting	Yes
Power	-
Size WxHxD	220,2 x 150 x 150 mm (8,7"x5,9"x5,9") 4,95 L/dm³
Operating Noise	36 / 30 dB in Eco Mode

Weight	3,20 kg / 6,61 lbs.
Keystone	Vert.: +/-40° Hori.: +/-40°
Illumination	80%
Frequenz	H-sync: 27-100 kHz V-sync: 24-120 Hz Range max.: 162 MHz
Foot-Lamberts	37 fL / max. 321 cm screen width 127 cd/m²

- Full HD 1080P compatible
 - Integrated Mediaplayer
 - Eco Mode
 - 360° installable
- Features
- 24/7 continuous operation capable
 - PJLink™
 - Wi-Fi network compatible.
 - Lan network compatible.
 - SD card slot

Please note	Modell "W" ist weiß. Modell "B" ist schwarz. Modell "F" mit anderer Halterung.
Status	2016 Discontinued (EOL) // Last update of the data: 2024-10-02 Created: 2016-10-25 13:53:23

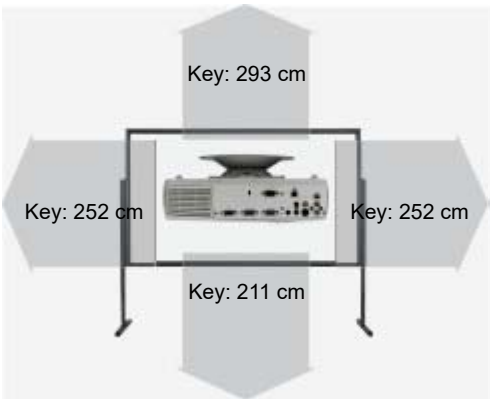

More Details



HCinema

<https://www.projector-database.com/pro/panasonicpjjw130-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.