

# Panasonic PT LB51NTE/U/A



## Brief Introduction

Beta 2.5

A brief introduction to the PT LB51NTE/U/A: The Panasonic LCD projector offers 2000 Ansi-Lumen, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 389 cm well. However, if room light is available, the image width should ideally not exceed 259 cm. The model was built by Panasonic in 2007 and is no longer current.

## Display Type



3 x 0,6" LCD TFT Panel  
XGA 4/3 Liquid Crystal Display

## Ansi-Lumen

2000

667 Lux (bei 200 cm Screen)

## Contrast

400:1 full on/off

400:1 full on/off

## Black Level Offset

5,0000 min. Lumen

1,68 min. Lumen

## Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

## Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.

## Light Source

Medium screen width or rooms with little light, max. 100 lumens.

## Light Life

165W UHP Lamp

Articel Nr.: ET-LAB50

2000 h.

## Operating Costs

-

## Focus

Manual

## Zoom

Manual 1,2

## Objective

F=1,6-1,9 f=18,8-22,6 mm

## Throw Ratio


1,54-1,85:1

## Audio

1W Mono

## Connections

D-sub 15 pin in und out  
S-Video in  
Cinch Video in  
Cinch Stereo in  
Mini Jack in und out  
RS232C Din 8 pin

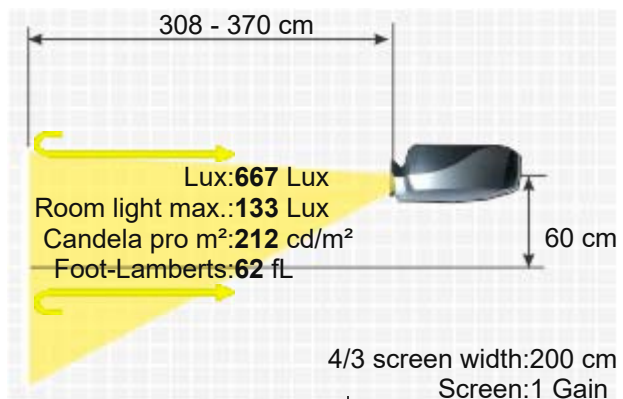



Ceiling Mounting Yes  
 Power 240W / 2W standby  
 Size WxHxD 297 x 57 x 210 mm (11,7"x2,2"x8,3") 3,56 L/dm<sup>3</sup>  
 Operating Noise 34 dB in Eco Mode

Weight 1,90 kg / 4,19 lbs.  
 Keystone Vert.: +/-30°  
 Illumination 85%

Frequenz H-sync: 15-91 kHz  
 V-sync: 50-85 Hz

Foot-Lamberts 62 fL / max. 389 cm screen width  
 212 cd/m<sup>2</sup>

- Direkt Power Off
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- Wi-Fi network compatible.
- Wireless Lan
- Daylight View 2 (automatically adjusts to the brightness of the room).
- 3x digital zoom
- 2 sec quick start function.

In Test -

Lamp ruby	Ruby-LMP15554
Lamp incl. air filter original	ET-LAB50
Compatible lamp	LMP-K15554
Optional Universal Remote original	Fernb-uni-V3
Remote control original	N2QAYB000169
Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d17532>  
 2007 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details  **HCinema**  
<https://www.projector-database.com/pro/panasonicptlb51nt-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.