

Panasonic PT LX271




The Panasonic model PT LX271 is a DLP projector with XGA 1024 x 768 resolution and a contrast of 4000:1. The lamp in the projector is specified with a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours a day. An image width of up to 453 cm is possible as the projector has 2700 Ansi lumens. However, if room light is available, the picture should be max. 302 cm wide. The model was built by Panasonic in 2013 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

 1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2700

900 Lux (bei 200 cm Screen)

Contrast

4000:1 full on/off

4000:1 full on/off

Black Level

Offset

0,6750 min. Lumen

0,225 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

190W UHM Lamp

Light Life

Articel Nr.: ET-LAL330

5000 h. 10000 h. in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,41-2,53 f=21,8-24,0 mm

Throw Ratio

1,95-2,15:1

Audio

8W Mono

Connections

HDMI in
2 x D-Sub 15 pin in 1 x ou
Cinch Video in
RS232C Din 9 pin in
Mini Jack Audio in und out
RJ45 in

Ceiling Mounting

Yes

Power


260W

Size WxHxD

288 x 100 x 230 mm (11,3"x3,9"x9,1") 6,62 L/dm³

Operating Noise

34 / 29 dB in Eco Mode

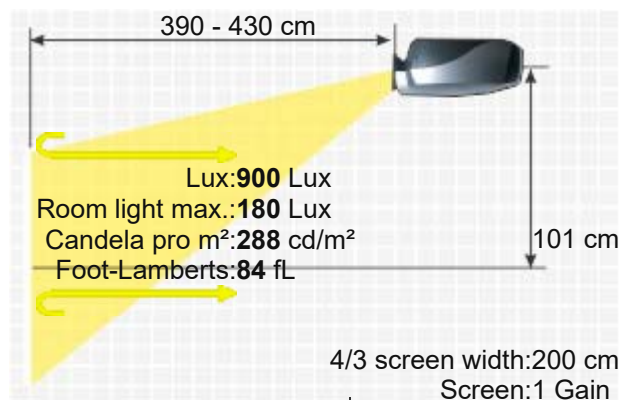

Key: 428 cm


Weight 2,50 kg / 5,51 lbs.
Keystone Vert.: +/-40°
Illumination -
Frequenz H-sync: 15-91,1 kHz
V-sync: 24-85,1 Hz
Range max.: 162 MHz
Foot-Lamberts 84 fL / max. 453 cm screen width
288 cd/m²



Features
■ Eco Mode
■ PJLink™
■ Lan network compatible.

Optional Remote control original H458UB01G001
Lamp original ET-LAL330

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi22121>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-07-26 13:56:18

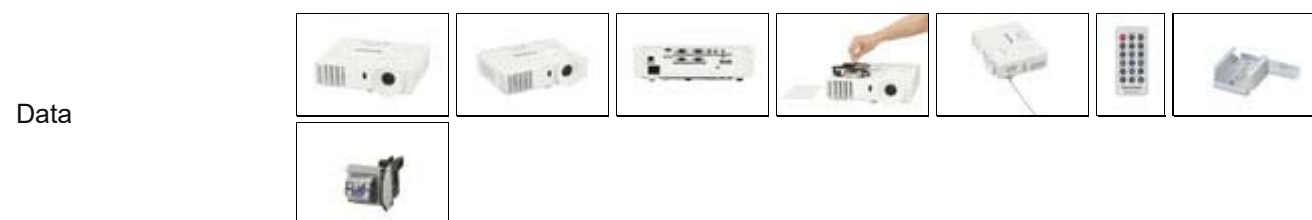

HCinema

<https://www.projector-database.com/pro/panasonicptlx271-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.