


Panasonic PT-RZ120 -B -W -LB -LW

PANASONIC PT-RZ120 -B -W -LB

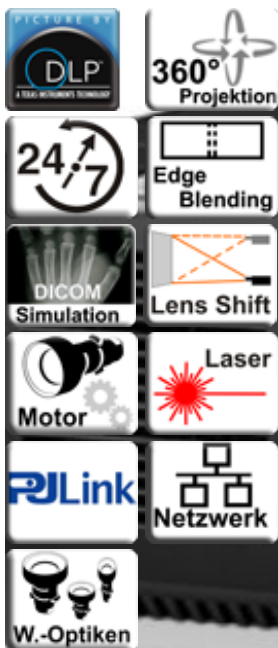

The Panasonic PT-RZ120 -B -W -LB -LW large format laser DLP projector has 12000 Ansi lumens, a contrast of 10000:1 and a WUXGA 1920 x 1200 resolution. It is a laser projector with 20000 hours of light life, which is over 13.7 years with four hours of use per day. Includes a lens shift and keystone correction function, which provides freedom during installation. 1113 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, we recommend a maximum of 742 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. The model is also Full HD 1080P compatible. Even projection onto the ceiling is possible thanks to the 360° projection. The model was built by Panasonic in 2018 and is no longer current, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type



1 x 0,67" DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

12000

5333 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

1,2000 min. Lumen

0,533 min. Lumen

Lens shift

Vert.: +50% -16% Hori.: +30% -10%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laserdiode

Light Life

Article Nr.: N2QAYA000060

20000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered 1,41

Objective

F=1,7-1,9 f=25,6-35,7 mm

Throw Ratio

1,7-2,4:1

Audio

Nein

Connections


HDMI in

DVI-D in

D-sub 15pin in

5 x BNC RGBHV in

RS232C Din 9 pin in

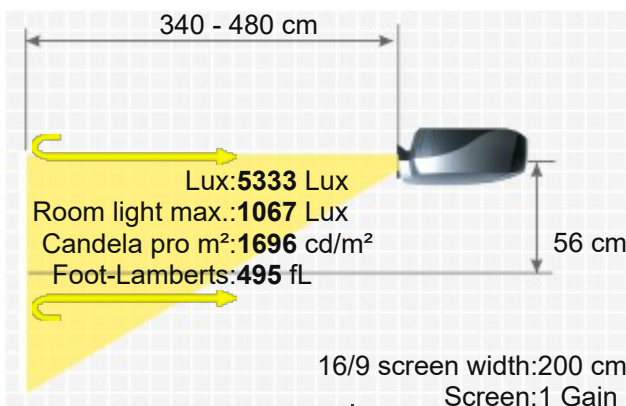

	RJ45 in
	SDI IN BNC x 1 (3G/HD/SD-SDI)
	DIGITAL LINK
Ceiling Mounting	Yes, is possible.
Power	1100W
Size WxHxD	498 x 200 x 581 mm (19,6"x7,9"x22,9") 57,87 L/dm³
Operating Noise	44 / 41 dB in Eco Mode


Weight	23,60 kg / 50,71 lbs.
Keystone	Vert.: +/-40°
	Hori.: +/-40°
Illumination	90%

Frequenz	H-sync: 15-100 kHz
	V-sync: 24-120 Hz

Foot-Lamberts	495 fL / max. 1113 cm screen width
	1696 cd/m²

Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Eco Mode ■ 360° installable ■ 24/7 continuous operation capable ■ Edge Blending ■ PJLink™ ■ Lan network compatible. ■ Picture-in-picture ■ DICOM simulation ■ PT-RZ120L offers the same performance as PT-RZ120, but comes without a lens.
----------	---

Screen Mirroring	-
------------------	---

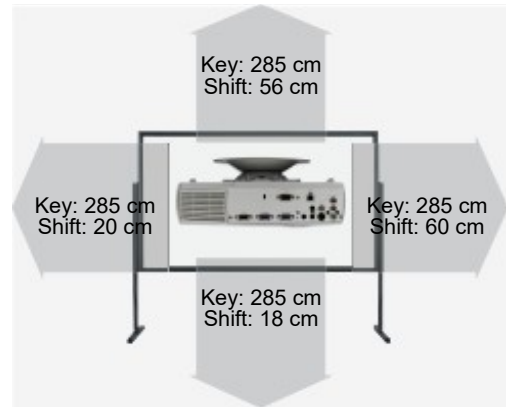

Optional accessories

	Objektiv Original	ET-DLE035	9.303,39 €
	Objektiv Original	ET-DLE170	1.458,35 €
	Objektiv Original	ET-DLE150	3.481,37 €
	Objektiv Original	ET-DLE060	4.005,06 €
	Objektiv Original	ET-DLE105	5.215,56 €
	Deckenhalterung Original	ET-PKD130B	EOL €
	Deckenhalterung Original	ET-PKD120S	EOL €
	Deckenhalterung Original	ET-PKD120H	EOL €
	Objektiv Gebraucht Original	ET-DLE250	1.898,73 €
	Objektiv Gebraucht Original	ET-DLE150Z	1.839,23 €
	Objektiv Gebraucht Original	ET-DLE450	1.482,23 €
	Objektiv Gebraucht Original	ET-DLE350	3.481,37 €
	Objektiv Original	ET-DLE055	4.151,99 €
	Objektiv Gebraucht Original	ET-DLE085	2.811,38 €
	Fernbedienung Original	N2QAYA000060	30,40 €

Name	Ratio	Optional Lenses			
		Distance	Shift V	Shift H	Zoom
		Zoom Optional Lenses			
ET-DLE450	5.36-8.58:1	10.7-17.2 m	50-16%	28-10%	
ET-DLE350	3.58-5.45:1	7.2-10.9 m	50-16%	28-10%	Powered
ET-DLE250	2.27-3.62:1	4.5-7.2 m	50-16%	28-10%	Powered
ET-DLE170	1.71-2.41:1	3.4-4.8 m	50-16%	28-10%	Powered
ET-DLE150	1.3-1.89:1	2.6-3.8 m	50-16%	30-10%	Powered
ET-DLE105	0.98-1.32:1	2-2.6 m	50-16%	28-10%	Powered
ET-DLE085	0.78-0.98:1	1.6-2 m	50-16%	28-10%	Powered
ET-DLE060	0.6-0.8:1	1.2-1.6 m	40-16%	19-10%	Powered
Fix Optional Lenses					
ET-DLE055	0.79:1	1.6 m	0.00% Fix		No Zoom
ET-DLE035	0.38:1	0.8 m			No Zoom

Status

2018 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2018-09-23 17:56:32



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptrz120-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.