

Boxlight 2015



The Boxlight 2015 LCD projector has 3500 Ansi lumens, a contrast of 650:1 and an SXGA+ 1400 x 1050 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 515 cm is possible, if the image width is smaller (we recommend max. 343 cm), rooms with residual light are also no problem. It came onto the market in 2006 and is no longer offered by the manufacturer Boxlight.

 3 x 0,99" LCD TFT Panel mit MLA
SXGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector	3500 / 2800 im Eco Mode	Screen	1167 Lux (bei 200 cm Screen)
Contrast	650:1 full on/off		650:1 full on/off
Black Level	5,3846 min. Lumen		1,804 min. Lumen

Lens shift
Vert.: +50% -0% motorisch

SXGA+ 1400 x 1050

Resolution
1.470.000 Pixel

Video Modes
UXGA 1600 x 1200 compressed

Application
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

310W UHB Lamp
Articel Nr.: LMPf6999

Light Life
1500 h. 2000 h. in Eco Mode

Operating Costs
-

Focus
Powered

Zoom
Powered 1,48

Objective
F=1,7-2,4 f=31-46 mm

Throw Ratio
1,5-2,3:1

Audio
2 x 1W Stereo

Connections
M1-DA (DVI) in
D-sub 15p in und out
5 x BNC RGBHV in
Cinch Stereo in
Cinch Video in
S-Video in
Mini Jack in
RS232C
RJ45




Ceiling Mounting
Yes

Power
470W

Size WxHxD
420 x 150 x 320 mm (16,5"x5,9"x12,6") 20,16 L/dm³

Operating Noise
38 / 35 dB in Eco Mode

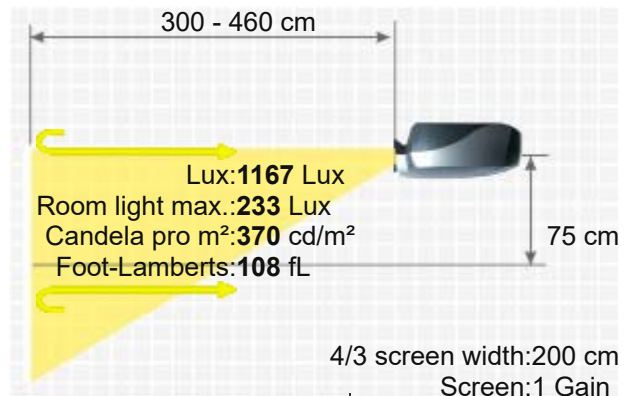

Key: 80 cm

Weight

7,70 kg / 16,98 lbs.

Keystone

Vert.: +/-15°
Hori.: +/-3°

Illumination

-

Frequenz

H-sync: 15-91 kHz
V-sync: 50-120 Hz

Foot-Lamberts

108 fL / max. 515 cm screen width
370 cd/m²

- Features

 - Lens shift Funktion motorisch
 - Freeze
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Picture-in-Picture
 - Lan network compatible.
 - Digital Zoom
 - Pin Code Security System
 - De-interlacer

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Boxlight SL502	1.12-1.51:1	2.2-3 m	50%		Powered
Boxlight LL503	2.25-4.13:1	4.5-8.3 m	50%		Powered
Boxlight FL501	0.79-0.79:1	1.6-1.6 m	0.0% Fix		Powered
Boxlight LL504	3.96-7.26:1	7.9-14.5 m	50%		Powered

Status

2006 Discontinued (EOL) // Last update of the data: 2023-08-04


Data

More Details



HCinema

<https://www.projector-database.com/pro/boxlight2015-en.html>

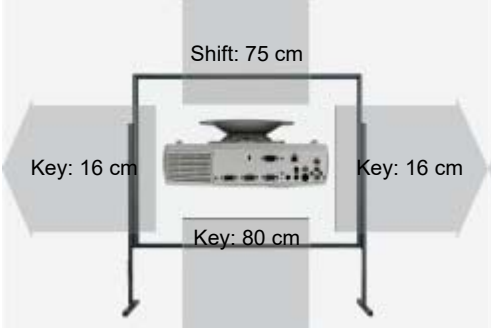

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.