

Panasonic PT-VMW50 /E/U

PANASONIC PT-VMW50 /E/U



Brief Introduction

Beta 2.5

The Panasonic PT-VMW50 /E/U stationary 3D laser LCD projector has 5000 Ansi lumens, a contrast of 3000000:1 and a WXGA 1280 x 800 resolution. Due to the laser, the projector is specified with 20000 hours of light life, which is over 13.7 years if enjoyed for four hours a day. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 5000 Ansi lumens, a picture width of 718 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend a maximum of 479 cm). Video signals 1080P and 3D are also no problem for the projector, and it even has the option of projecting HD 1080P Blu-rays onto the ceiling thanks to 360° projection. The model was built by Panasonic in 2019 and is no longer current.



3 x 0,64" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Display Type

Ansi-Lumen

Projector 5000

Screen 2000 Lux (bei 200 cm Screen)

Contrast

3000000:1 full on/off

Screen 3000000:1 full on/off

Black Level

0,0017 min. Lumen

Screen 0,001 min. Lumen

Lens shift

Vert.: +44% -0%

Resolution

WXGA 1280 x 800
1.024.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

Laser

Light Life

Articel Nr.: N2QAYA000204
20000 h.

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual 1,6

Objective

F=1,6-2,12 f=15,3-24,64 mm

Throw Ratio


1,09-1,77:1

Audio

1 x 10W

Connections

2x HDMI in
D-sub 15pin in und out
Cinch Video in

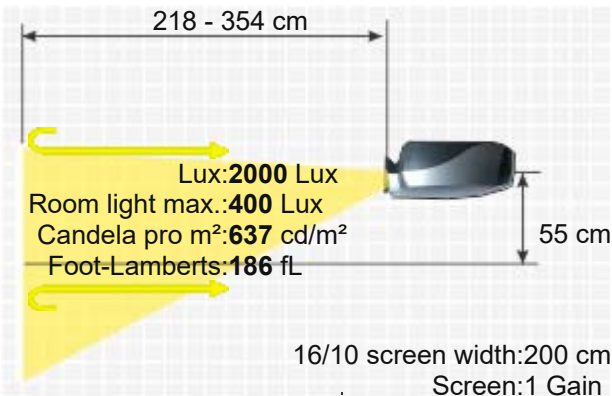

Cinch Stereo in
Mini Jack Audio 2x in und out
USB in
RS232C Din 9 pin in
RJ45 in
HDBaseT
Ceiling Mounting Yes
Power -
Size WxHxD 399 x 115 x 348 mm (15,7"x4,5"x13,7") 15,97 L/dm³
Operating Noise -

Weight 7,20 kg / 15,87 lbs.
Keystone Vert.: +/-35°
Hori.: +/-35°

Illumination -

Frequenz -

Foot-Lamberts 186 fL / max. 718 cm screen width
637 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.

Optional	Remote control original	N2QAYA000204
	Air filter original	ET-RFV500
	Ceiling bracket original	ET-PKV400B
	Ceiling bracket original	ET-PKL100S
	Ceiling bracket original	ET-PKL100H

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9001886>
2019 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2019-01-14 14:51:18



HCinema
<https://www.projector-database.com/pro/panasonicptvmw50-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

