

Plus U5 732h

PLUS U5 732H



Brief Introduction

Beta 2.5

The U5 732h DLP has 2500 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The integrated media player allows files to be played directly. Thanks to the brightness of 2500 Ansi lumens, a picture width of 435 cm is possible. In room light, the picture should be max. 290 cm wide. The model was built by Plus 2005 and is no longer current.

Display Type



1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2500 / 2000 im Eco Mode

833 Lux (200 cm Screen width)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,2500 min. Lumen

0,417 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: JPEG, MJPEG (AVI), MPEG I/II, MP3

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W Lamp

Light Life

Article Nr.: 28-030

2000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,4-2,6 f=26,5-31,8 mm

Throw Ratio

1,87-2,255:1

Audio

1 x 0,8W Mono

Connections

D-sub 15pin in
Cinch Video in
S-Video in
Mini Jack in
RS232C Din 9pin
USB Typ B

Ceiling Mounting

Yes, is possible.

Power


280 / 250W in Eco Mode

Size WxHxD

216 x 60 x 260 mm (8,5"x2,4"x10,2") 3,37 L/dm³

Operating Noise

37 / 33 dB in Eco Mode

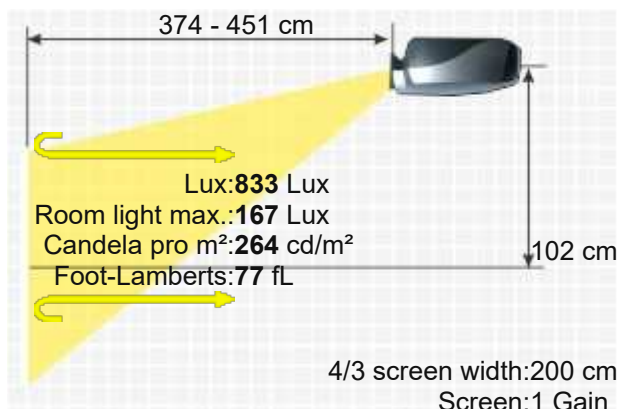

Key: 202 cm

Weight	2,10 kg / 4,63 lbs.
Keystone	Vert. +12°-15°
Illumination	-
Frequenz	H-sync: 15-80 kHz V-sync: 50-85 Hz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²
Features	Integrated Mediaplayer Freeze Eco Mode Kensington Slot Gamma correction Password protection Remote control with laser pointer und mouse control
	Digital Zoom 2x Presentation Timer
Screen Mirroring	-



Optional accessories

	Lampe Ruby	Ruby-LMP4648	93,40 €
	Lampe Original	28-030	EOL €
	Kompatible Lampe	LMP-K15616	75,26 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €

Status 2005 Discontinued (EOL) // Last update of the data: 2026-06-09



More Details



HCinema

<https://www.projector-database.com/pro/plusu5732h-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.