

Boxlight 4850

BOXLIGHT 4850



Brief Introduction

Beta 2.5

A brief introduction to the Boxlight 4850. The standard portable DLP projector has an SVGA 800 x 600 resolution and a contrast of 100:1. 300 Ansi lumens ensure that an image width of 151 cm is also possible. However, if room light is available, the picture should be max. 101 cm wide. It is no longer offered by the manufacturer Boxlight.



1 x DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

300 97 Lux (bei 203 cm Screen)

Contrast

100:1 full on/off 100:1 full on/off

Black Level

3,0000 min. Lumen 1 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

NTSC, NTSC 4.43, PAL, PAL (BGDHI), PAL-M, PAL-N, PAL-60, SECAM

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Very narrow picture width and rooms with very little light.

Light Life

100W UHP Lamp

Operating Costs

Focus

Manual

Zoom

Manual

Objective

Throw Ratio

Audio

Connections

S-Video in

Cinch Stereo in

D-sub 15pin in

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

9 fL / max. 151 cm screen width


31 cd/m²

Features

Status

Data

- Discontinued (EOL) // Last update of the data: 2023-08-04

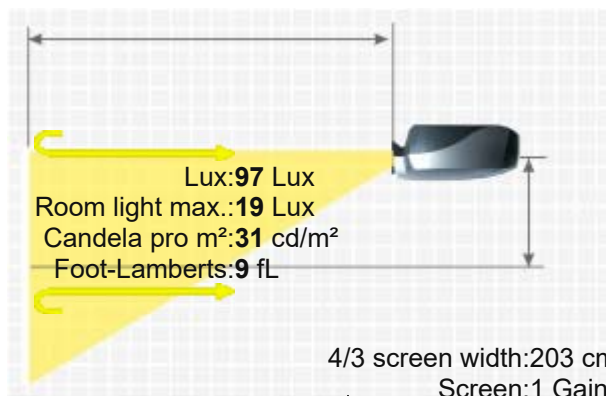

HCinema

<https://www.projector-database.com/pro/boxlight4850-en.html>