

Runco VX 5000d

RUNCO VX 5000D



The high-end home cinema VX 5000d DLP projector from Runco has 1700 Ansi lumens, a contrast of 4400 - 5500:1 and an HDTV 1280 x 720 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 419 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 279 cm. The model was built by Runco in 2003 and is no longer current, but is still one of the most popular projectors. It should also be noted that there are unfortunately no longer any replacement lamps available for this projector, neither originals nor replicas.

Brief Introduction

Beta 2.5

Display Type

1 x 0,8" HD2+ DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 1700

Screen 756 Lux (bei 200 cm Screen)

Contrast

Projector 4400 - 5500:1 full on/off

Screen 4400 - 5500:1 full on/off

Black Level

Projector 0,3864 min. Lumen

Screen 0,172 min. Lumen

Lens shift

Vert.: +/-120% Hori.: +/-71% motorisch

Resolution

HDTV 1280 x 720

921.600 Pixel

Video Modes

NTSC, PAL HDTV 480p, 1080i und 720p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

250W NSH Lamp

Articel Nr.: RUPA 004910 / 151-1031-00

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

-

Connections

D-sub 15pin


DVI-I HDCP

S-Video

YUV

Cinch Video

RS232C

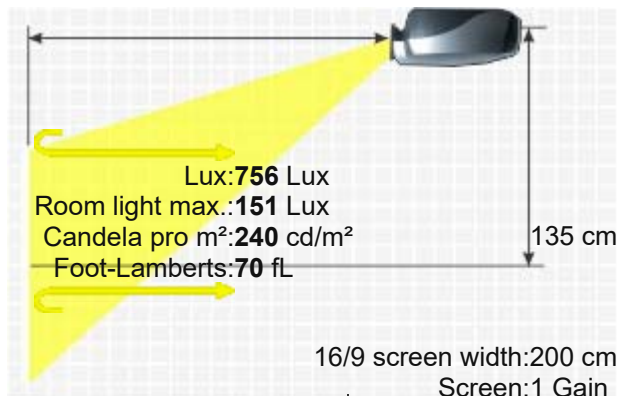


12 Trigger
Weitere vom DHD Controller
D-sub 15pin
DVI-I HDCP
S-Video
YUV
Cinch Video
Ceiling Mounting
Power 375W
Size WxHxD 252,7 x 53 x 706,2 mm (9,9"x2,1"x27,8") 9,43 L/dm³
Operating Noise -

Weight 33,11 kg / 73 lbs.
Keystone Vertical
Illumination -

Frequenz H-sync: 15-81 kHz
V-sync: 43-100 Hz

Foot-Lamberts 70 fL / max. 419 cm screen width
240 cd/m²

- Features
- Lens shift Funktion motorisch
 - Gamma correction
 - Dynamic iris
 - Overscan adjustable
 - Including DHD Controller with 3:2 Pulldown

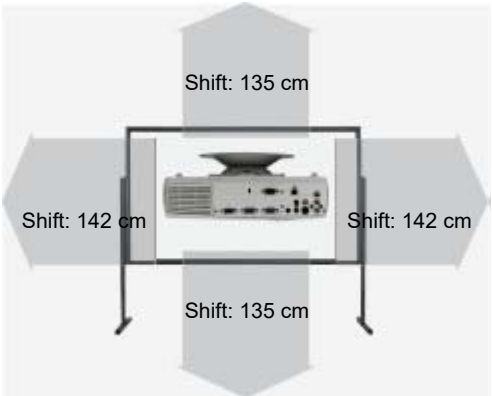

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Runco Lens Option 4	4.85-7.75:1	9.7-15.5 m			Powered
Runco Lens Option 3	2.76-4.85:1	5.5-9.7 m			Powered
Runco Lens Option 2	1.95-2.74:1	3.9-5.5 m			Powered
Runco Lens Option 1	1.57-1.95:1	3.1-3.9 m			Powered
Fix Optional Lenses					
Runco Lens Option 5	0.8:1	1.6 m			No Zoom

Status 2003 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/runcovx5000d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.