

Sanyo PLC XC55

SANYO PLC XC55



Brief Introduction

Beta 2.5

A brief introduction to the PLC XC55: The Sanyo standard portable LCD projector offers 3100 Ansi lumens, a contrast of 600:1 and an XGA 1024 x 768 resolution. An image width of up to 485 cm is possible. However, the image should be smaller in room light. We recommend max. 323 cm. The model was built by Sanyo in 2008 and is no longer current.

Display Type

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3100

1033 Lux (bei 200 cm Screen)

Contrast

600:1 full on/off

600:1 full on/off

Black Level

5,1667 min. Lumen

1,73 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

220W UHP Lamp

Articel Nr.: LMP-127

Light Life

1500 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,60-1,76 f=22,33-26,80 mm

Throw Ratio

1,74-2,09:1

Audio

7W Mono

Connections

DVI-I mit HDCP in

D-sub 15 pin in und out

S-Video in

Cinch Video in

RS232C Din 9 pin in

Mini jack Audio in und out

Ceiling Mounting


Yes

Power

281 / 205W in Eco Mode

Size WxHxD

410 x 111,2 x 266,8 mm (16,1"x4,4"x10,5") 12,11 L/dm³

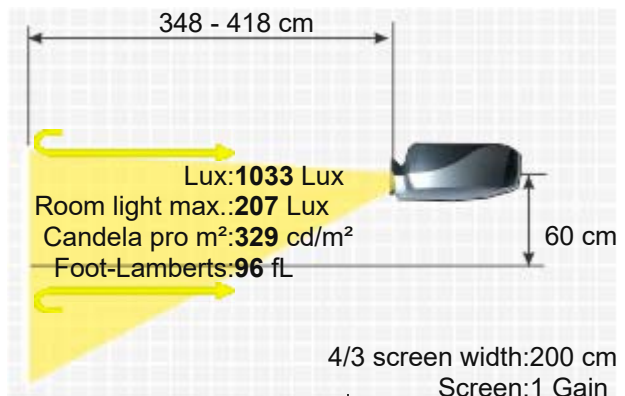

Operating Noise 34 / 27 dB in Eco Mode

Weight 4,20 kg / 9,26 lbs.
Keystone -
Illumination 85%
H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 140 MHz
Foot-Lamberts 96 fL / max. 485 cm screen width
329 cd/m²

- Features
- Freeze
 - Blackboard Modus
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 -

Optional	Bulb only	NLMP18410
	Lamp ruby	Ruby-LMP18410
	Lamp original	610-339-8600 / LMP127 / ET-SLMP127
	Compatible lamp	LMP-K18409
	Universal Remote original	Fernb-uni-V3
	Remote control original	645 097 1600 / CXYV
	Air filter original	POA-FIL-063 / 610-339-7665 / ET-SFYL063
Status	Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18409>
2008 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/sanyoplxc55-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.