2600 LUMENS

XGA RESOLUTION

LARGE VENUES

BOXLIGHT

MP-385t

Conference room presentations are instantly brighter with the BOXLIGHT MP-385t MULTIMEDIA projector. Featuring 2600 ANSI LUMENS of brightness, true XGA resolution, and 500:1 CONTRAST RATIO for bright, detailed images in large venues. This well-designed unit includes POWER LENS SHIFT, optional zoom lenses and an EASY-TO-REPLACE LAMP to simplify installations. HDTV COMPATIBILITY, digital input and DIGITAL PROGRESSIVE SCANNING ensure that you get your message across with the highest QUALITY IMAGES possible. The BOXLIGHT MP-385t is powered with features to make every presentation memorable and every installation easy. Call the digital projector specialists at BOXLIGHT today.

19332 Powder Hill Place
Poulsbo, Washington 98370
800.762.5757
360.779.7901
www.boxlight.com

BOXLIGHT®
Presenting a Better Way

BOXLIGHT and the BOXLIGHT logo are registered trademarks of BOXLIGHT Corporation. © Copyright BOXLIGHT Corporation, 2002.
All other marks are the property of their respective owners. Specifications subject to change without notice. M1-MP-385t-6/02

BOXLIGHT

MP-385t

projector

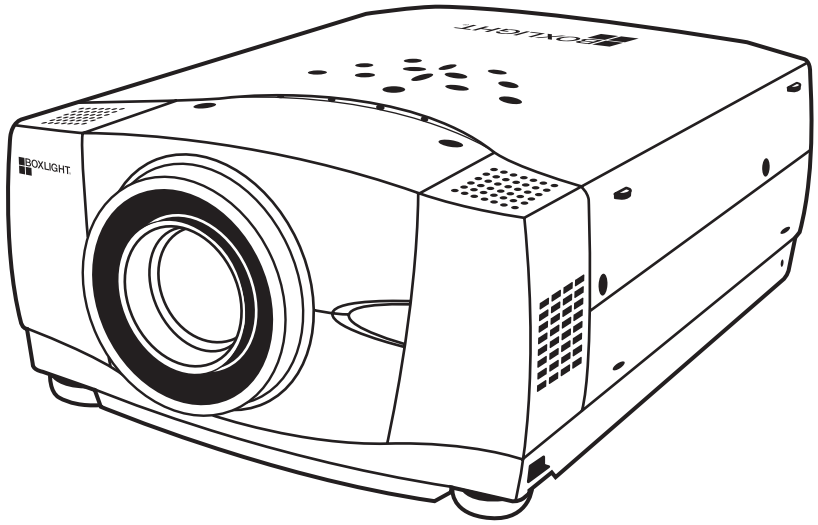

- *Perfect for fixed installations.*
- *2600 lumens will light up large venues.*
- *True XGA resolution with compression to SXGA. HDTV compatibility.*
- *Digital keystone correction.*
- *Digital zoom imaging.*
- *Multiple inputs, including DVI.*
- *Power lens shift.*
- *Optional lenses are available.*
- *Easy lamp replacement.*
- *Wired/wireless laser remote control.*
- *Power management function.*
- *All BOXLIGHT projectors feature the latest in technology and design.*
- *Lifetime 24/7 technical support.*
- *The fastest response time in the industry from our state-of-the-art service center.*

BOXLIGHT®
Presenting a Better Way

To contact BOXLIGHT:

Direct	800.762.5757
Rental	800.736.6954
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Toll Free FAX	888.353.4242
Internet	www.boxlight.com

AMERICAN EXPRESS®
Business Finance

Resolution	1024 x 768 XGA with compression up to 1280 x 1024 SXGA	**Dimensions**	12.6"/32.0 cm (W) x 6.6"/16.8 cm (H) x 16.8"/43 cm (D)
Brightness	2600 ANSI lumens	**Horiz. Scan Frequency**	15-100 kHz
Lamp	200 watt, UHP	**Vertical Refresh Rate**	50-100 Hz
Display Type	(3) 1.3 in/3.3 cm TFT polysilicon LCDs	**Projection Lens**	Motorized zoom and focus, 1:1.3 zoom ratio, F/1.8-2.1, f=48.2-62.6 mm
Contrast Ratio	500:1	**Diagonal Image Size**	31-400 in / 79-1016 cm
Colors	16.7 million	**Throw Distance**	4.6-48 ft / 1.4-14.7 m
Aspect Ratio	4:3, 16:9 compatible	**Keystone**	Digital adjustment of +/- 40 degrees
Inputs	Computer: (1)15 pin; (1) BNC x 5 (doubles as Component input),(1) DVI-D	**Adjustments**	On-board and remote
	Video: (1) Component/Composite, (1) S-video. Audio: (1) RCA (L/R),	**Power Supply**	100V-240V; 50/60 Hz
	(2) Computer mini-jack	**Power Consumption**	300 watts
Outputs	Control Port: RS-232 control and mouse operation; USB mouse control	**Compatibility**	SXGA, XGA, SVGA, VGA, Mac
Audible Noise	37 dB	**Warranty**	Two-year parts and labor (120-day lamp warranty)
Audio	(2) built-in 2-watt speakers	**Accessories Included**	Wired/wireless laser remote, wired remote cable, power cord, VGA cable,
Video	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM		Mac adapter, PS/2 mouse cable, Mac mouse cable, serial mouse cable, dust co
HDTV/EDTV	Compatibility: 1080i, 1035i, 720p, 575p, 575i, 480p, 480i	**Optional Accessories**	Ceiling mount plate and suspension pole, ceiling round flush mount kit,
Weight	17.4 lb / 7.9 kg		5-BNC to 15-pin high definition video cable, standard USB mouse cable,
FCC Rating	Class B Certification		various carry cases, audio/video cables, RF remote controls, optional lenses