

Sharp XG C50XE/U

SHARP XG C50XE/U



Brief Introduction

Beta 2.5

The XG C50XE/U LCD projector from Sharp has 3000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 477 cm well. If room light is available, however, the image width should ideally not exceed 318 cm. Playing 1080P is also no problem for the projector. The model was built by Sharp in 2002 and is no longer current.

Display Type



3 x 0,99" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector

3000 / 2400 im Eco Mode

Screen

971 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

7,5000 min. Lumen

2.446 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

250W UHP Lamp

Articel Nr.: RLMPFA003WJZZ BQC-

XGC50X//1

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,27

Objective

f=36,5-46,3 mm

Throw Ratio

1,8-2,3:1

Audio

3W Mono

Connections

Video x 1 (RCA)

S-Video x 1


Audio L/R Stereo x 1 (RCA)

Computer RGB/component x 2 (15-pin mini D-Sub)

Audio L/R x 1

3,5 mm Stereo Mini Jack x 1

RS232C Serial Port x 1 (9-pin D-Sub)

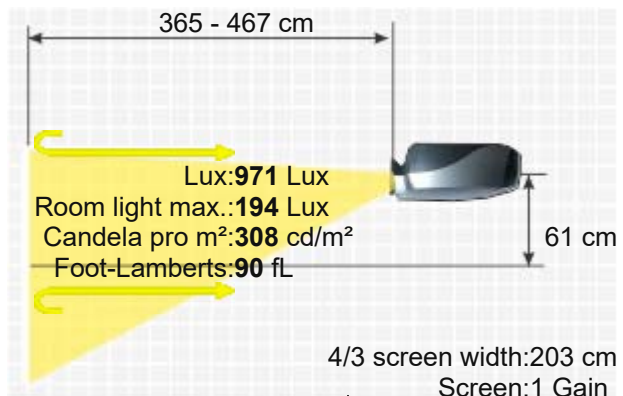

	Wire Fernbedienung x 1 (3,5 mm mini jack)
	USB x 1
Ceiling Mounting	Yes
Power	340W
Size WxHxD	390 x 113 x 294 mm (15,4"x4,4"x11,6") 12,96 L/dm³
Operating Noise	36 / 33 dB in Eco Mode

Weight	5,10 kg / 11,24 lbs.
Keystone	Vertical
Illumination	-
Frequenz	H-sync: 15-126 kHz V-sync: 43-200 Hz Range max.: 230 MHz
Foot-Lamberts	90 fL / max. 477 cm screen width 308 cd/m²

- Full HD 1080P compatible
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Digital image shift
- Picture-in-Picture
- Password protection
- Crestron®-Software compatible.
-

Optional	Lamp ruby	Ruby-LMP3579
	Lamp ruby	Ruby-LMP3580
	Bulb only original	RLMPFA003WJZZ
	Lamp original	BQC-XGC50X/1
	Compatible lamp	LMP-K19966
	Universal Remote original	Fernb-uni-V3
	Air filter original	PFILDA005WJZZ

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d3635>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AN-C27MZ	2.66-4.22:1	5.4-8.6 m	40% Fix		Manual
AN-C41MZ	4.06-5.72:1	8.2-11.6 m	40% Fix		Manual
AN-C12MZ	1.18-1.49:1	2.4-3 m	40% Fix		Manual

Status 2002 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

<https://www.projector-database.com/pro/sharpxgc50x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.