

SIM2 Crystal Cube



Brief Introduction

Beta 2.5

Manufacturer SIM2 offers the Crystal Cube, a DLP projector with HDTV 1920 x 1080 resolution. A picture width of up to 508 cm is possible because the projector has 2500 ANSI lumens. However, if room light is present, the picture should be no more than 339 cm wide. Video signals 1080P and 3D are also no problem for the projector. The model was built by SIM2 in 2013 and is no longer up to date.

Display Type



1 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

2500 / im 2D Modus

1111 Lux (bei 200 cm Screen)

Contrast

-

-

Black Level

-

-

Offset

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Homeciname | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200 / 165W im Eco Mode Lamp

Light Life

-

Operating Costs

-

Focus

Manual

Zoom

Manual 1,49

Objective

-

Throw Ratio

1,38-2,05:1

Audio

Nein

Connections

HDMI 1.4 in
D-sub 15pin in
YUV in
Cinch Video in
S-Video in
USB A,B in
RS232C Din 9 pin in
3D Sync Out
12V Trigger out

Ceiling Mounting

Yes, is possible.

Power

260W

Size WxHxD


315 x 190 x 315 mm (12,4"x7,5"x12,4") 18,85 L/dm³

Operating Noise

-

Weight

9,00 kg / 19,84 lbs.

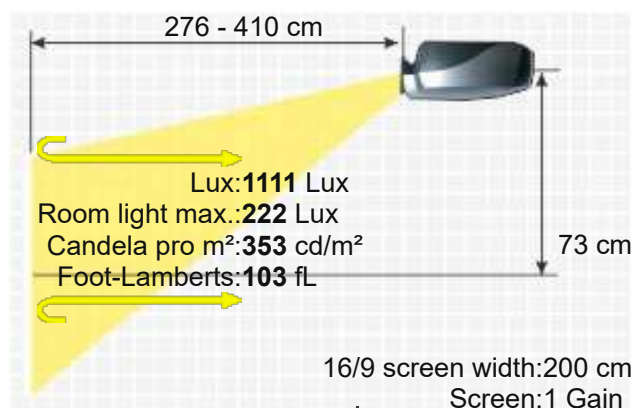

Keystone	-
Illumination	-
Frequenz	H-sync: 15-102 kHz V-sync: 24-144 Hz
Foot-Lamberts	103 fL / max. 508 cm screen width 353 cd/m ²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Lan network compatible. ■ 6-segment colour wheel
Screen Mirroring	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads
Status	2013 Discontinued (EOL) // Last update of the data: 2025-03-03
Data	



HCinema

<https://www.projector-database.com/pro/sim2crystalcube-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.