

SIM2 NERO3 PLUS /WG /BG /ST

SIM2 NERO3 PLUS /WG /BG /ST



A brief introduction to the SIM2 NERO3 PLUS /WG /BG /ST. The home cinema DLP LED projector has an HDTV 1920 x 1080 resolution and a contrast of 30000:1. The manufacturer SIM2 specifies a service life of 20000 hours, which converts to over 13.7 years at 4 hours per day. The integrated lens shift gives freedom when positioning the projector. An image width of up to 393 cm is possible. However, the image should be smaller in room light. We recommend max. 262 cm. The model is also Full HD 1080P and 3D compatible. The model was built by SIM2 2017 and is no longer current.

Brief Introduction Beta 2.5

Display Type



1 x DMD Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 1500

Screen 667 Lux (bei 200 cm Screen)

Contrast

30000:1

Screen 30000:1

Black Level

0,0500 min. Lumen

Screen 0,022 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-10%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

LED

Light Life

20000 h.

Operating Costs

0,00 € LED

Focus

Powered

Zoom

Powered 2,34

Objective

-

Throw Ratio

1,23-2,88:1

Audio


-

Connections

1 x Component - YCbCr/RGBs (RCA)
1 x Graphic RGBHV/YCrCb (1x D-Sub 15 pin)
1 x S-Video
2 x HDMI (v.1.4 with Deep Color)
1 x RS-232
1 x USB (B type socket)
1 x USB (Service only)
3D Sync Out

Ceiling Mounting

Yes

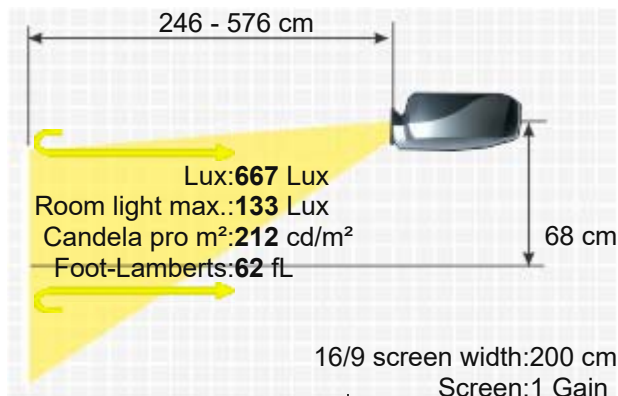


Power -
Size WxHxD 365 x 176 x 502 mm (14,4"x6,9"x19,8") 32,25 L/dm³
Operating Noise -

Weight 12,00 kg / 26,46 lbs.
Keystone -
Illumination -

Frequenz H-sync: 15-80 kHz
V-sync: 48-144 Hz

Foot-Lamberts 62 fL / max. 393 cm screen width
212 cd/m²

Features ■ Real Full HD 3D
■ Full HD 1080P compatible
■ Lens shift Funktion

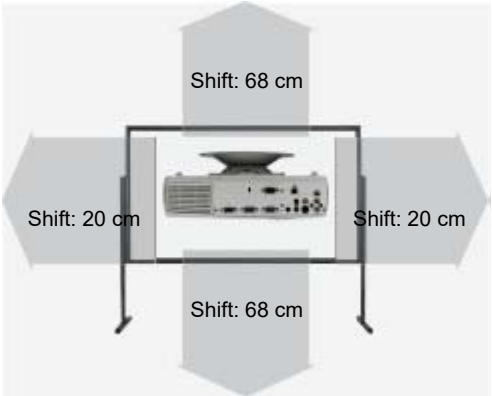

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Nero3 Plus ST	1.23-1.5:1	2.5-3 m			Powered
NERO3 PLUS	1.51-2.88:1	3-5.8 m			Powered

Status 2017 Discontinued (EOL) // Last update of the data: 2023-08-04
Data Created: 2019-04-20 13:09:08

More Details



HCinema
<https://www.projector-database.com/pro/sim2nero3plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.