

# Sony VPL DX15



SONY VPL DX15



With the VPL DX15, manufacturer Sony offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 700:1. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. An image width of up to 477 cm is possible. However, the picture should be smaller in room lighting. We recommend max. 318 cm. The model was built by Sony in 2009 and is no longer current.

 3 x 0,63" LCD TFT Panel  
XGA 4/3 Liquid Crystal Display

|                    |                         |        |                              |
|--------------------|-------------------------|--------|------------------------------|
| Projector          | 3000 / 2400 lm Eco Mode | Screen | 1000 Lux (bei 200 cm Screen) |
| Contrast           | 700:1 full on/off       |        | 700:1 full on/off            |
| Black Level Offset | 4,2857 min. Lumen       |        | 1,435 min. Lumen             |

Resolution  
XGA 1024 x 768  
786.432 Pixel

SXGA+ 1400 x 1050 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

**Media player formats:** Microsoft PowerPoint®, Excel®, Windows Media® Video (WMV) und JPEG-Dateien

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

200W Lamp

Articel Nr.: LMP-D200

2000 h.

Operating Costs  
16,67% / 0,07 €

Focus  
Manual

Zoom  
Manual 1,2

Objective  
F=1,65-1,8 f=18,63-22,36 mm

Throw Ratio  
1,46-1,75:1

Audio  
1W Mono

D-sub 15 pin in

S-Video in

Cinch Video in

RJ45 in

USB Typ A




Ceiling Mounting  
Yes

Power  
320W / 10,5W standby

Size WxHxD  
295 x 74 x 204 mm (11,6"x2,9"x8") 4,45 L/dm³

Operating Noise  
-

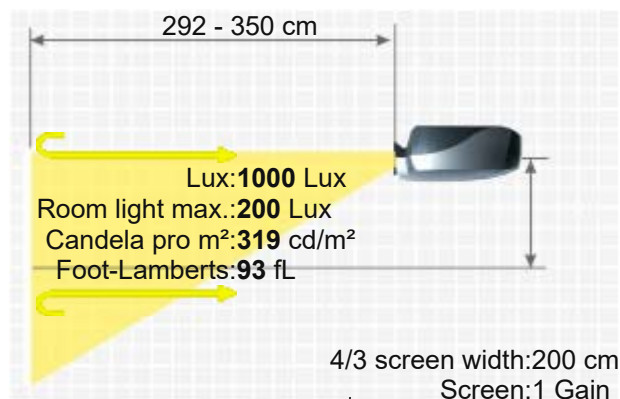

|                                                                                                                                   |                                               |                    |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|--------------------|
| Weight                                                                                                                            | 2,20 kg / 4,85 lbs.                           |                    |
| Keystone                                                                                                                          | -                                             |                    |
| Illumination                                                                                                                      | -                                             |                    |
| Frequenz                                                                                                                          | H-sync: 19-80 kHz<br>V-sync: 48-92 Hz         |                    |
| Foot-Lamberts                                                                                                                     | 93 fL / max. 477 cm screen width<br>319 cd/m² |                    |
| Features                                                                                                                          | ■ Integrated Mediaplayer                      |                    |
|                                                                                                                                   | ■ Freeze                                      |                    |
|                                                                                                                                   | ■ Eco Mode                                    |                    |
|                                                                                                                                   | ■ Kensington Slot                             |                    |
|                                                                                                                                   | ■ Gamma correction                            |                    |
| Optional                                                                                                                          | ■ Password protection                         |                    |
|                                                                                                                                   | ■ Wi-Fi network compatible.                   |                    |
|                                                                                                                                   | ■ Lan network compatible.                     |                    |
|                                                                                                                                   | Philips bulb only                             | NLMP18937          |
|                                                                                                                                   | Lamp ruby                                     | Ruby-LMP18937      |
| Status                                                                                                                            | Lamp original                                 | LMP-D200           |
|                                                                                                                                   | Compatible lamp                               | LMP-K18935         |
|                                                                                                                                   | Remote control original                       | 148717712 / RM-PJ6 |
|                                                                                                                                   | Ceiling Mount 100-120                         | Halterung100       |
| Order here: <a href="https://www.hcinema.de/lampen/shop-en.php?id=n18937">https://www.hcinema.de/lampen/shop-en.php?id=n18937</a> |                                               |                    |
| 2009 Discontinued (EOL) // Last update of the data: 2023-08-04                                                                    |                                               |                    |



More Details

HCinema

<https://www.projector-database.com/pro/sonyvpldx15-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.