

Sony VPL FHZ700L

SONY VPL FHZ700L



The VPL FHZ700L laser LCD has 7000 Ansi lumens and a WUXGA 1920 x 1200 resolution. The lifespan is 20000 hours due to the laser, which is over 13.7 years with a daily viewing time of 4 hours. Built-in horizontal and vertical keystone correction provides freedom when positioning the projector. An image width of up to 850 cm is possible, if the image width is smaller (we recommend max. 567 cm), rooms with residual light are also no problem. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. The model is also Full HD 1080P compatible and can therefore project Blu-rays even onto the ceiling thanks to 360° projection. The model was built by Sony in 2014 and is no longer current.



3 x 0,95" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector 7000

-

0,8800 min. Lumen

-

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

Articel Nr.: 149289111 / RM-PJ27

20000 h.

0,00 € Laser

Powered

Powered 1,6

-


1,39-2,23:1

-


HDMI in
DVI-D in
D-Sub 15 pin in und out
5 x BNC RGBHV in
YUV in

Screen 3111 Lux (bei 200 cm Screen)

-

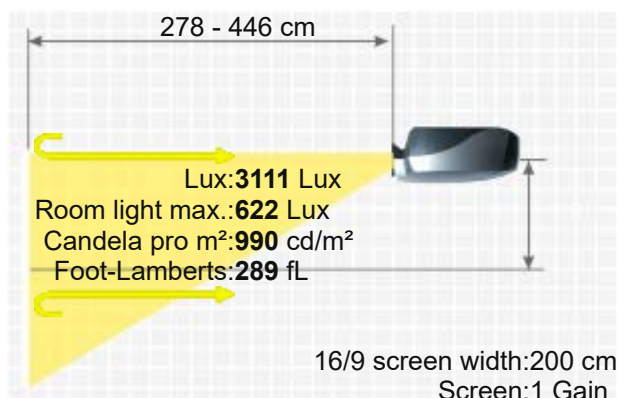

	S-Video in Cinch Video in Cinch Stereo in Mini Jack Audio in und out RS232C RJ45 in
Ceiling Mounting	Yes
Power	-
Size WxHxD	390 x 148 x 504 mm (15,4"x5,8"x19,8") 29,09 L/dm³
Operating Noise	-
Weight	12,00 kg / 26,46 lbs.
Keystone	Vert.: +/-20° Hori.: +/-20°
Illumination	-
Frequenz	-
Foot-Lamberts	289 fL / max. 850 cm screen width 990 cd/m²
Features	Full HD 1080P compatible Direkt Power Off Eco Mode Gamma correction Warping 360° installable Edge Blending Picture-in-Picture Password protection PJLink™ Lan network compatible. Crestron®-Software compatible. DICOM simulation picture-in-picture auto dimming auto brightness email report HDBaseT optional
	Object lens original VPLL-Z4025
	Object lens original VPLL-Z4015
	Object lens original VPLL-Z4011
	Remote control original 149289111 / RM-PJ27 / 148909211 / RM-PJ19
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=hc1349
	2014 Discontinued (EOL) // Last update of the data: 2024-10-02
	Created: 2014-04-29 16:24:59
Optional	
Status	

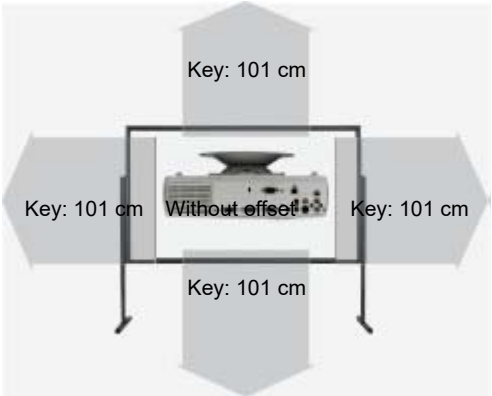

More Details

HCinema

<https://www.projector-database.com/pro/sonyvp1fhz700l-en.html>