


Model	SEATTLE WX30N+
Technology	.59" 3LCD
Brightness	3000 Lumen (Standard) 1950 (Economy mode)
Native Resolution	1280 x 800 (WXGA)
Supported Resolution	up to 1600 x 1200 (UXGA)
Brightness Uniformity	>80%
Projection Methods	Desktop front/rear, Ceiling front/rear
Colors	16.7 million true color
Contrast Ratio	600:1
Aspect Ratio	Native 16:10; Compatible 4:3 and 16:9
Image Size	40"-300"
Projection Distance	5' to 30'
Lens Shift	N/A
Throw Ratio	1.45~1.73 (x screen width)
Zoom Ratio	1.2:1
Digital Zoom	4x zoom with pan function
Keystone Correction	Vertical +/- 30 degrees
Horizontal Scan Rate	31 to 92 kHz
Vertical Scan Rate	48 to 120 Hz
Audio Output	1 x 8W mono
Lamp	220W
Lamp Life	3000/4000 (standard/economy)
Remote Control	Multi-function IR remote with laser pointer
Noise Level	<33dB eco mode
Power Supply	Universal AC Input 100-240Vat 50-60Hz
Power Consumption	310W, <1W in standby mode
Safety Certifications	FCC-B, UL, cUL, TUB, CD, CE, CCC
Computer Compatibility	UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
Connectivity	VGA x 2*, HDMI, composite video with 2 RCA (R/L) audio-in, component video, S-Video, Audio 3.5 mm in x 2, LAN, RS232, USB port for interactive function, VGA* and 3.5 mm output *2 VGA inputs, 2nd VGA input is input or output optional
Service and Network Control	RS232, RJ45
Weight	7.3 lbs
Dimensions (W x H x D)	12.8" x 10.24" x 3.8"
Operating Temperature	N/A
Security	Kensington® Lock Port, keypad lock, anchor security bar
Standard Accessories	AC power cord, VGA cable, USB cable, remote control with batteries, user manual (CD), carrying case
Optional Accessories	Replacement lamp, replacement remote, ALLINONE ceiling mount, USB-boost, harsh environment filter



Key Features

- Side changing lamp
- Side changing filter
- Quick off/on
- Advanced Anti-theft features, Kensington® lock, Keypad lock, Security Anchor bar
- Five auto features (Auto search, Auto sync, Auto ceiling, Auto keystone and Auto filter alert)
- Seven display modes (Natural, Cinema, Daylight, Green board, White board, Black board, and User)
- Logo capture
- Image freeze function
- Digital zoom adjustment up 4x
- Built in Network Control software via RJ45 (LAN) connection
- Multi-Language OSD (On-Screen Display)
- Powerful 8W Mono Speaker
- TAA compliant

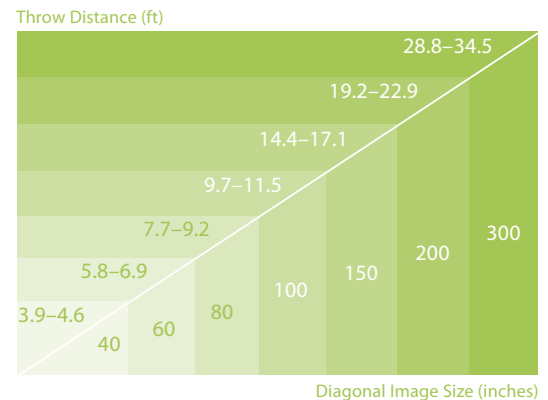

Note: allow 3-5% variance on all projector throw ratios



Award Winning Technical Support 24/7/365

And, of course, all BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.