

# Sony VPL SW535C



The Sony VPL SW535C LCD whiteboard projector has 3000 Ansi lumens, a contrast of 2500:1 and a WXGA 1280 x 800 resolution. The projector also offers a lens shift function, which makes setting up the image childs play. Thanks to the brightness of 3000 Ansi lumens, an image width of 556 cm is possible. In room light, the picture should be max. 371 cm wide. The projector offers an interactive whiteboard function for interactive training courses and presentations. The model was built by Sony in 2012 and is no longer current, but is still very popular in our projector database.



3 x 0,75" LCD TFT Panel  
WXGA 16/10 Liquid Crystal Display

## Brief Introduction

Beta 2.5

## Display Type

Ansi-Lumen  
Contrast  
Black Level  
Lens shift

3000 / 2000 im Eco Mode  
2500:1 full on/off  
1,2000 min. Lumen  
Vert.: +/-4,4% Hori.: +/-2,7%  
WXGA 1280 x 800

## Resolution

1.024.000 Pixel  
UXGA 1600 x 1200 compressed

## Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

## Application

Whiteboard | Training and company presentations, as well as product presentations.  
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

## Light Source

210W Lamp

## Light Life

Articel Nr.: LMP-E212

3000 h. 6000 h. in eco Mode

## Operating Costs

-

## Focus

Manual

## Zoom

Manual

## Objective

-

## Throw Ratio

-

## Audio

1 x 1W Mono

## Connections

HDMI in  
D-sub 15 pin in und out  
S-Video in  
RS232C Din 9 pin in  
RJ45 in  
Mini Jack Audio in und out  
USB Typ B

## Ceiling Mounting

Yes

## Power

280W

## Size WxHxD

384,4 x 161,10 x 423,40 mm (15,1"x6,3"x16,7") 26,15 L/dm³

## Operating Noise

35 / 28 dB in Eco Mode

## Weight


7,10 kg / 15,65 lbs.

## Keystone

Vert.: +/-5°

## Illumination

-

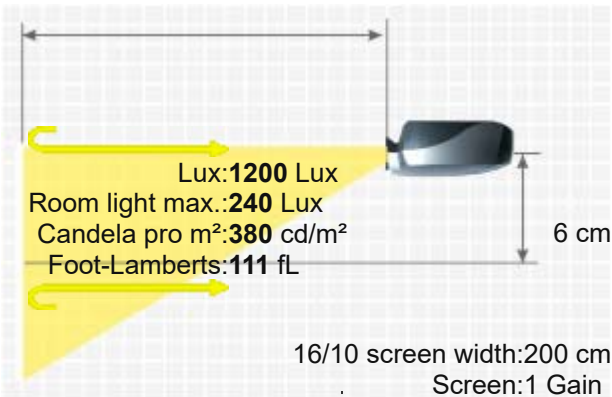

Frequenz  
H-sync: 14-93 kHz  
V-sync: 47-93 Hz

Foot-Lamberts  
111 fL / max. 556 cm screen width  
380 cd/m²

- Features
- Lens shift Funktion
  - Freeze
  - Eco Mode
  - Password protection
  - Control via web browser
  - Lan network compatible.
  - Digital Zoom
  - CPU Pentium III 1.0GHz
  - Interactive Pen
  - Whiteboard function

Optional  
Lamp original LMP-E212  
Remote control original 148922211 / RM-PJ7

Status Data  
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=20834>  
2012 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



**HCinema**  
<https://www.projector-database.com/pro/sonyvplsw535c-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.