

Toshiba TDP T80

TOSHIBA TDP T80



Brief Introduction

Beta 2.5

A brief introduction to the Toshiba TDP T80. The standard portable DLP projector has an XGA 1024 x 768 resolution and a contrast of 2000:1. With a brightness of 1600 Ansi lumens, a picture width of 348 cm is possible. In room light, the picture should be max. 232 cm wide. The model was built by Toshiba in 2004 and is no longer current.

Display Type



1 x 0,7" DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

1600

533 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

0,8000 min. Lumen

0,267 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, HDTV 720p, 1080i,

Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200 / 160W im Eco Mode Lamp

Articel Nr.: TLPLW3

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,27

Objective

F=2,4-2,65 f=28,04-35,59 mm

Throw Ratio

2,0-2,4:1

Audio

ja

Connections

2 x D-sub 15pin in 1 x out

Cinch Video in

2 x Cinch Stereo in

S-Video in

USB in

RS232C in

Mini Jack in und out

Ceiling Mounting

Yes

Power


-

Size WxHxD

298 x 101 x 275 mm (11,7"x4"x10,8") 8,28 L/dm³

Operating Noise

-

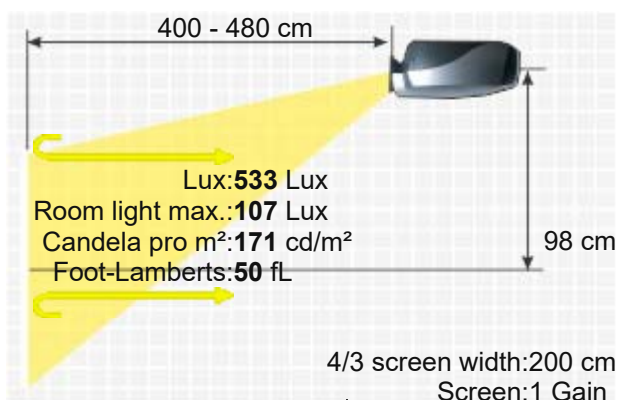


Key: 205 cm

Weight 2,80 kg / 6,17 lbs.
Keystone Vert.: +/-15°
Illumination -
Frequenz H-sync: 15-93 kHz
V-sync: 50-85 Hz
Foot-Lamberts 50 fL / max. 348 cm screen width
171 cd/m²

Features ■ Eco Mode
■ Kensington Slot
■

Osram bulb only NLMP4500
Lamp ruby Ruby-LMP4500
Lamp original TLPLV6
Compatible lamp LMP-K15499
Universal Remote original Fernb-uni-V3

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15499>
2004 Discontinued (EOL) // Last update of the data: 2023-08-04

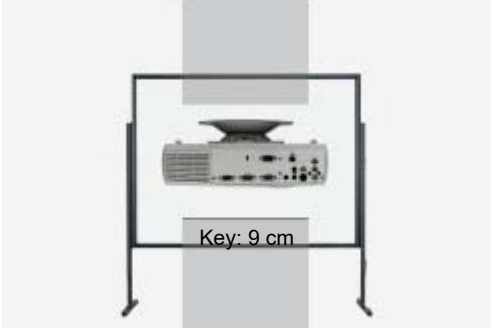

HCinema

<https://www.projector-database.com/pro/toshibatdpt80-en.html>