

Canon LX MU700

EAN/UPC:4549292047233

CANON LX MU700



A brief introduction to the LX MU700: The Canon DLP projector offers 7500 Ansi lumens, a contrast of 2100:1 and a WUXGA 1920 x 1200 resolution. The projector also offers a lens shift function that makes image adjustment childs play. An image width of up to 880 cm is possible, if the image width is smaller (we recommend max. 587 cm), rooms with residual light are also no problem. The model is also Full HD 1080P compatible and even has the option of projecting HD 1080P Blu-rays onto the ceiling using 360° projection. It was launched in 2015 and is no longer offered by the manufacturer Canon.

Brief Introduction

Beta 2.5

Display Type

1 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 7500 Screen 3333 Lux (bei 200 cm Screen)

Contrast

2100:1 full on/off 2100:1 full on/off

Black Level

3,5714 min. Lumen 1,589 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10%

Resolution

WUXGA 1920 x 1200

Video Modes

2.304.000 Pixel
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 350 / 280W Lamp
Articel Nr.: 0953C001AA / LX-LP01

Light Life

2000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

-

Connections

HDMI in
DVI-D in
D-sub 15pin in und out
5 x BNC RGBHV in
RS232C Din 9 pin in
RJ45 mit HDBaseT in
3D Sync Out

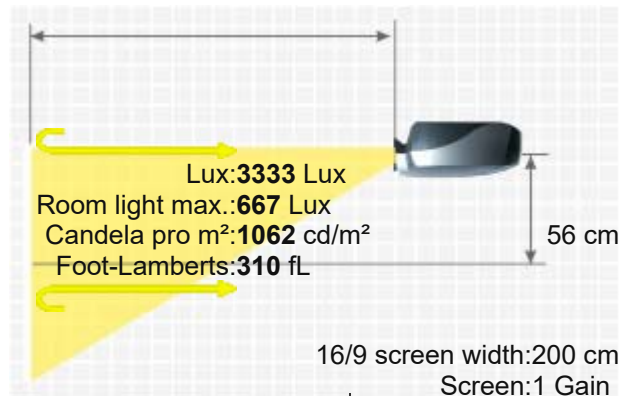


Ceiling Mounting Yes
Power 850 / 680W in Eco Mode
Size WxHxD 502,9 x 221 x 525,8 mm (19,8"x8,7"x20,7") 58,24 L/dm³
Operating Noise 41 / 36 dB in Eco Mode

Weight 19,14 kg / 42,2 lbs.
Keystone Vert.: +/-40°
Illumination 85%
H-sync: 15,62-91,1 kHz
Frequenz V-sync: 24-85,06 Hz
Range max.: 157.5 MHz
Foot-Lamberts 310 fL / max. 880 cm screen width
1062 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- 360° installable
- Lan network compatible.

Object lens original	RS-IL02LZ / 4967B001AB
Lamp original	0953C001AA / LX-LP01
Object lens original	0951C001 / LX-IL01UW
Object lens original	0949C001 / LX-IL04MZ
Object lens original	0948C001AB / LX-IL03ST
Object lens original	0948C001AA / LX-IL03ST
Object lens original	0946C001 / LX-IL07WF
Object lens original	0945C001 / LX-IL06UL
Object lens original	0944C001 / LX-IL05LZ

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc153>

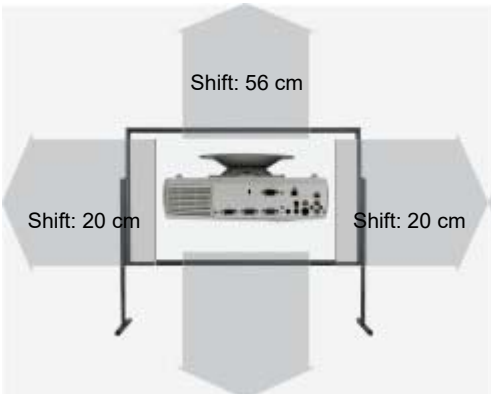

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
RS-IL02LZ	1.25-1.79:1	2.5-3.6 m	50%	+/-10%	
LX-IL06UL	5.31-8.26:1	10.6-16.5 m	50%	+/-10%	Powered
LX-IL05LZ	3.58-5.38:1	7.2-10.8 m	50%	+/-10%	Powered
LX-IL04MZ	2.22-3.67:1	4.4-7.3 m	50%	+/-10%	Powered
LX-IL03ST	1.73-3.67:1	3.5-7.3 m	50%	+/-10%	Powered
LX-IL01UW	0.75-0.93:1	1.5-1.9 m	50%	+/-6.7%	Powered
Fix Optional Lenses					
LX-IL07WF	0.76:1	1.5 m	0.00% Fix		No Zoom

Status 2015 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2015-12-03 10:52:09



More Details



HCinema

<https://www.projector-database.com/pro/canonlxmu700-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.