

Viewsonic PJD7828HDL

VIEWSONIC PJD7828HDL



Brief Introduction

Beta 2.5

A brief introduction to the PJD7828HDL: The Viewsonic standard portable 3D DLP projector offers 3200 Ansi lumens, a contrast of 22000:1 and an HDTV 1920 x 1080 resolution. The lamp in the projector is specified with a lamp life of 10000 hours, which is over 13.7 years if enjoyed for two hours every day. A picture width of up to 575 cm is possible. However, the picture should be smaller in room light. We recommend max. 383 cm. The HDMI MHL (Mobile High-Definition Link) port allows 1080p / 60 Hz image mirroring (screen mirroring) to be transmitted from the smartphone while it is being charged at the same time via the connection. Even 1080P video signals and 3D are no problem for the projector. The model was built by Viewsonic in 2016 and is no longer current.



1 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Projector	3200	Screen	1422 Lux (bei 200 cm Screen)
	22000:1 full on/off		22000:1 full on/off
	0,1455 min. Lumen		0,065 min. Lumen

Resolution

HDTV 1920 x 1080
2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Life

210W Lamp
Articel Nr.: RLC-100
4000 h. 10000 h. in eco Mode

Operating Costs

11,9% / 0,05 €

Focus

Manual

Zoom

Manual 1,3

Objective

-

Throw Ratio


1,15-1,50:1

Audio

1 x 10W

Connections

HDMI 1.4 mit MHL in
1 x D-sub 15pin in 1 x out
Cinch Video in

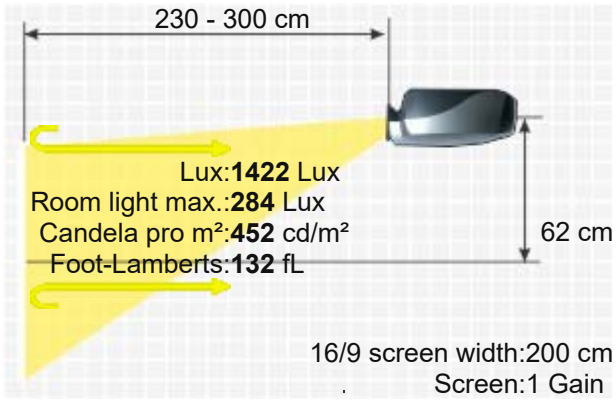

S-Video in
Mini Jack Audio in und out
RS232C Din 9 pin in
USB Typ A,B
Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
300W
316 x 103,7 x 228 mm (12,4"x4,1"x9") 7,42 L/dm³
35 / 30 dB in Eco Mode

Weight
Keystone
Illumination

2,40 kg / 5,29 lbs.
Vert.: +/-40°
-

Frequenz

H-sync: 15-100 kHz
V-sync: 24-120 Hz

Foot-Lamberts

132 fL / max. 575 cm screen width
452 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Digital Zoom: 0.8X~2.0X
- 6-segment colour wheel


Optional

Lamp original RLC-100
Remote control original A-00010031, RC-JVS15-190

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=23663>
2016 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2016-02-11 18:03:52

Data



More Details



HCinema

<https://www.projector-database.com/pro/viewsonicPJD7828HDL-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.