

Viewsonic PJD5226w

VIEWSONIC PJD5226w



Brief Introduction

Beta 2.5

With the PJD5226w, manufacturer Viewsonic offers a standard portable DLP projector with WXGA 1280 x 800 resolution and a contrast of 8000:1. The lamp in the projector is specified with a lamp life of 5000 hours, which is over 6.8 years if enjoyed for two hours every day. 2700 Ansi lumens ensure that a picture width of 528 cm is also possible. However, if room light is available, the picture should be max. 352 cm wide. It is also Full HD 1080P compatible. The model was built by Viewsonic in 2012 and is no longer current.



1 x 0,55" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

2700

1080 Lux (bei 200 cm Screen)

Contrast

8000:1 full on/off

8000:1 full on/off

Black Level

0,3375 min. Lumen

0,135 min. Lumen

Offset

-

Resolution

WXGA 1280 x 800

1.024.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W Lamp

Articel Nr.: RLC-077

Light Life

5000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

-

Throw Ratio

2,27-2,49:1

Audio

1 x 2W

Connections

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

Mini Jack Audio in

Ceiling Mounting

Yes

Power


285W

Size WxHxD

294 x 84 x 242 mm (11,6"x3,3"x9,5") 5,98 L/dm³

Operating Noise

32 / 29 dB in Eco Mode

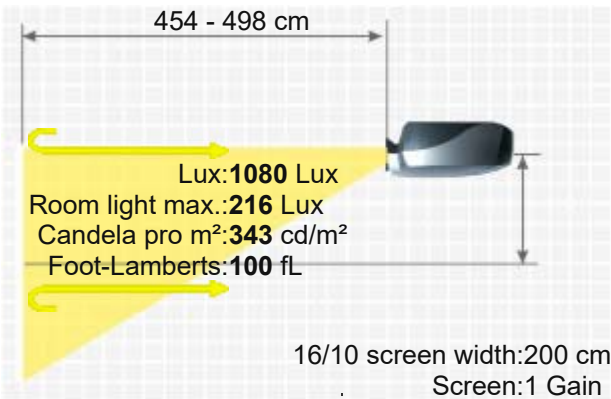

Key: 381 cm

Weight 2,60 kg / 5,73 lbs.
Keystone Vert.: +/-40°
Illumination -
Frequenz H-sync: 31-100 kHz
V-sync: 48-120 Hz
Foot-Lamberts 100 fL / max. 528 cm screen width
343 cd/m²
Features ■ Full HD 1080P compatible
■ Eco Mode
■ Crestron®-Software compatible.

Optional Lamp original RLC-077
Remote control original A-00009442

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=e10301>
Data 2012 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/viewsonicpjd5226w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.