

Vivitek D5000V



VIVITEK D5000V



Brief Introduction

Beta 2.5

Manufacturer Vivitek offers the D5000V, a DLP projector with XGA 1024 x 768 resolution and a contrast ratio of 2500:1. The integrated lens shift gives you freedom when setting up the projector. An image width of up to 628 cm is possible; if the image width is smaller (we recommend max. 419 cm), rooms with residual light are also no problem. Furthermore, the projector can play 1080P without any problems. The model was built by Vivitek in 2010 and is no longer current.

Display Type

 1 x 0,65" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 5200 Screen 1733 Lux (bei 200 cm Screen)

Contrast

Projector 2500:1 full on/off Screen 2500:1 full on/off

Black Level

Projector 2,0800 min. Lumen Screen 0,694 min. Lumen

Lens shift

Vert.: +60% -40% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

380W UHP Lamp

Article Nr.: 5811116765-SU

Light Life

1500 h. 2000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,25

Objective

F=2,46-2,56 f=22,82-28,49 mm

Throw Ratio


1,6-2,0:1


Audio

-

Connections

HDMI 1.3 in
DVI-D in
2 x D-sub 15 pin in
S-video in
Cinch Video in
Audio Mini Jack in und out
RJ 45 in
USB
2 x 12V Trigger out

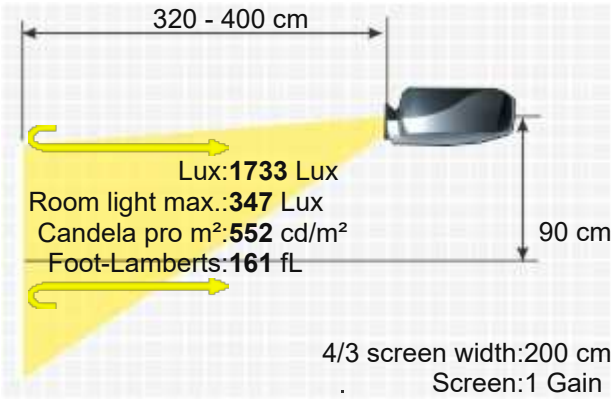

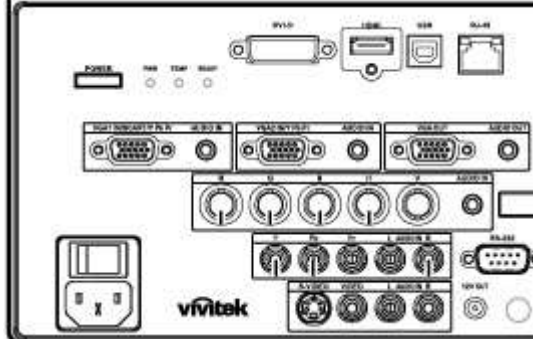

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
395 / 335W in Eco Mode
431 x 180 x 343 mm (17"x7,1"x13,5") 26,61 L/dm³
37 / 33 dB in Eco Mode

Weight
Keystone
Illumination

8,60 kg / 18,96 lbs.
Vert.: +/-30°
85%

Frequenz

H-sync: 15-90 kHz
V-sync: 50-85 Hz

Foot-Lamberts


161 fL / max. 628 cm screen width
552 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- BrilliantColor™
- Lan network compatible.
- Overscan adjustable
- Digital Zoom
- 3D-ready

Screen Mirroring

-

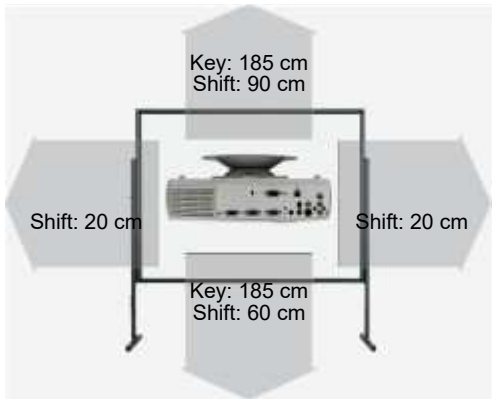

Optional accessories

	Nackte Osram Lampe	NLMP20209	138,24 €
	Lampe Ruby	Ruby-LMP20209	190,79 €
	Lampe Original	5811116765-SU	EOL €
	Kompatible Lampe	LMP-K20209	82,05 €
	Objektiv Original	5811116223-SU	EOL €
	Objektiv Original	5811116224-SU / VL905G	EOL €
	Objektiv Original	5811116225-SU	EOL €
	Fernbedienung mit Laserpointer	5041841300	31,39 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
5811116224-SU	2-3:1	4-6 m	60-40%	+/-10%	Powered
5811116223-SU	1.6-2:1	3.2-4 m	60-40%	+/-10%	Powered

Fix Optional Lenses

Status
Data

2010 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



<https://www.projector-database.com/pro/vivitek5000v-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.