

Vivitek D825ES

VIVITEK D825ES



A brief introduction to the D825ES: The Vivitek BrilliantColor DLP projector offers 2600 Ansi lumens, a contrast of 2200:1 and an SVGA 800 x 600 resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours every day. 444 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 296 cm. The model was built by Vivitek in 2009 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DDP2230 DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2600

867 Lux (bei 200 cm Screen)

Contrast

2200:1 full on/off

2200:1 full on/off

Black Level

1,1818 min. Lumen

0,395 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W Lamp

Articel Nr.: 5811100760-S

Light Life

4000 h.

Operating Costs

11,9% / 0,05 €

Focus

Manual

Zoom

Manual 1,14

Objective

-

Throw Ratio

1,9-2,16:1

Audio

1W Mono

Connections

D-sub 15 in und out

S-Video in

Cinch Video in

USB in

Mini Jack Audio in

Ceiling Mounting

Yes

Power


230W / 5W standby

Size WxHxD

-

Operating Noise

32 / 30 dB in Eco Mode

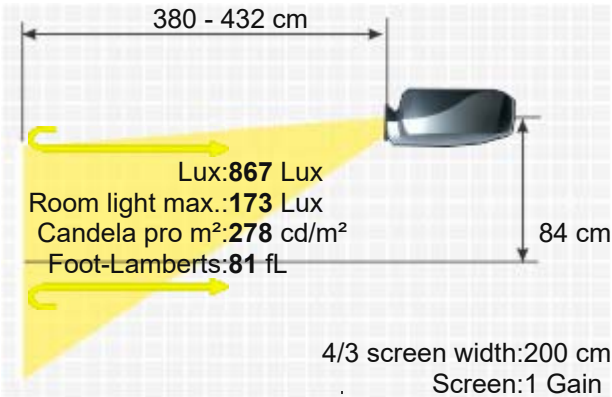

Key: 186 cm

Weight 2,59 kg / 5,71 lbs.
Keystone Vert.: +/-15°
Illumination -
Frequenz -
Foot-Lamberts 81 fL / max. 444 cm screen width
278 cd/m²

- Features
- Freeze
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Password protection
 - BrilliantColor™
 - Overscan adjustable
 - Digital Zoom
 - 5-segment colour wheel

	Bulb only Osram	NLMP19243
	Lamp ruby	Ruby-LMP19243
Optional	Lamp original	5811100760-S
	Compatible lamp	LMP-K19232
	Remote control original	5041841300

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19242>
2009 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/vivitek825es-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.