


Vivitek DU7095Z /WH/BK

VIVITEK DU7095Z /WH/BK

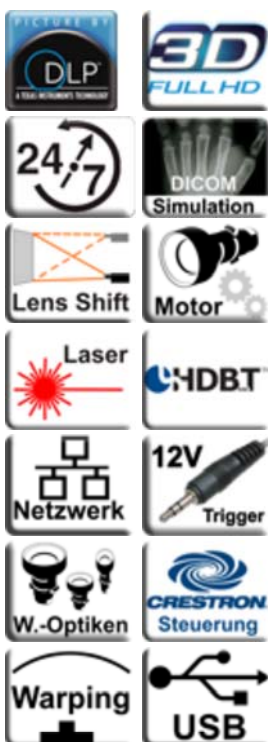

A brief introduction to the DU7095Z /WH/BK: The Vivitek stationary 3D laser DLP projector offers 6000 Ansi lumens, a contrast of 15000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer specifies a laser service life of 20000 hours, which is over 13.7 years if enjoyed for four hours a day. With the lens shift function, the projector can be positioned very freely. An image width of up to 787 cm is possible as the projector has 6000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 525 cm. Playing 1080P and 3D is also no problem for the projector. The model was built by Vivitek in 2017 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,67" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

6000

2667 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off

15000:1 full on/off

Black Level

0,4000 min. Lumen

0,178 min. Lumen

Lens shift

Vert.: +55% -15% Hori.: +/-5%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Laser-Phosphor

Light Life

20000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered 1,31

Objective

F=2,0-2,09 f=22,82-28,5 mm

Throw Ratio


1,73-2,27:1

Audio


2 x 10W

Connections

2 x HDMI 1.4 in
1 x DVI-D in
5 x BNC RGBHV in
D-sub 15pin in und out

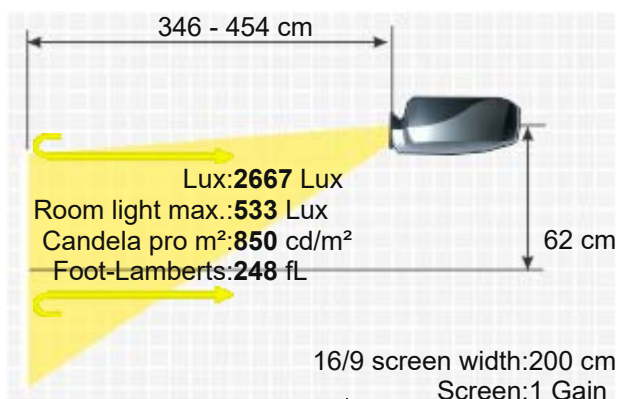

Ceiling Mounting
Power
Size WxHxD
Operating Noise

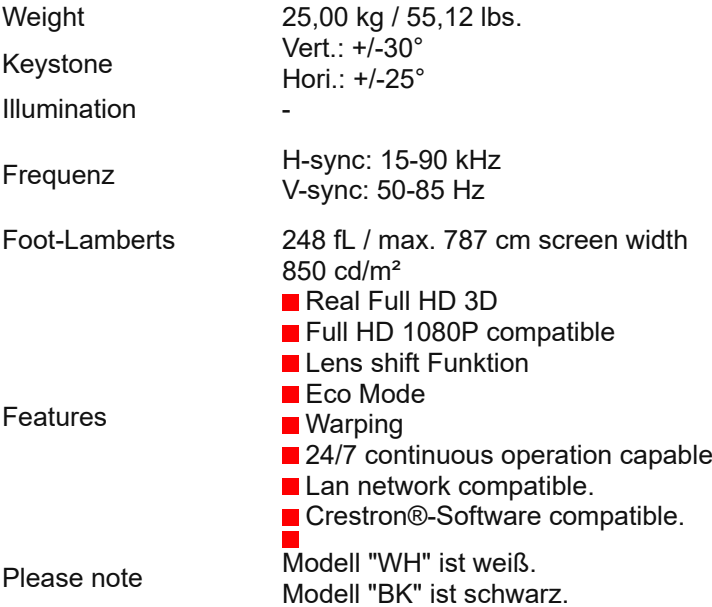

Optional	Object lens original	5811119237-SVV / VL908G
----------	----------------------	-------------------------

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1468>

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
VL909G	3-5:1	6-10 m	55-15%	+/-5%	Powered
VL908G	1.93-2.9:1	3.9-5.8 m	55-15%	+/-5%	Powered
VL907G	1.1-1.3:1	2.2-2.6 m	55-15%	+/-5%	Powered
VL906G	1.54-1.93:1	3.1-3.9 m	55-15%	+/-5%	Powered
Fix Optional Lenses					
VL904G	0.77:1	1.5 m	0.00% Fix		No Zoom

Status



More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCCinema is not responsible for any errors or omissions contained in product descriptions.