


Wolf Cinema PRO-115 ST



Brief Introduction

Beta 2.5

The Wolf Cinema PRO-115 ST short-throw DLP projector has 3500 Ansi lumens, a contrast of 15000:1 and a HDTV 1920 x 1080 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. This projector has a projection ratio of just 0.5:1. For a 2 m wide image, the projector needs to be just 100 cm away from the screen. Even 1080P video signals are no problem for the projector. The model was built by Wolf Cinema in 2015 and is no longer current.



1 x 0,65 DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

3500

Contrast

15000:1 full on/off

Black Level

0,2333 min. Lumen

Lens shift

Vert.: +74% --56%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

WUXGA 1920 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

280W Lamp

Articel Nr.: WC-LPU115

Light Life

3000 h. 7000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

0,5:1

Audio

-

Connections

HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB Typ B in
RS232C Din 9 pin in
RJ45 in
12V Trigger out

Ceiling Mounting

Yes

Power

290 / 230W in Eco Mode

Size WxHxD

286 x 124 x 265 mm (11,3"x4,9"x10,4") 9,4 L/dm³

Operating Noise

35 dB in Eco Mode

Weight


3,40 kg / 7,5 lbs.

Keystone

Vert.: +/-20°

Illumination

-

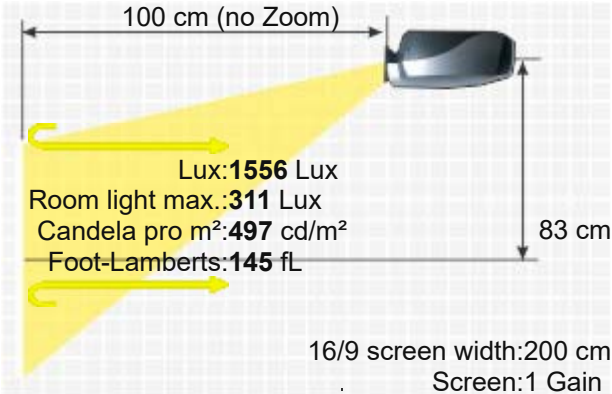

WOLF CINEMA PRO-115 ST

Frequenz V-sync: 24-85 Hz

Foot-Lamberts 145 fL / max. 601 cm screen width

497 cd/m²

■ Full HD 1080P compatible
■ Lens shift Funktion
■ Eco Mode
■ Lan network compatible.
■ Short-throw projector

Status 2015 Discontinued (EOL) // Last update of the data: 2023-08-04

Data Created: 2015-09-16 14:31:02



More Details



HCinema

<https://www.projector-database.com/pro/wolfcinemapro115st-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.