

Christie CP2415-Xe

CHRISTIE CP2415-XE



Brief Introduction

Beta 2.5

The CP2415-Xe 3D DLP for large events has 15,000 ANSI lumens, a contrast ratio of 2000:1, and HD2K 2048 x 1080 resolution. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. An image width of up to 1244 cm is possible; if the image width is smaller (we recommend max. 829 cm), rooms with residual light are also no problem. Furthermore, it is Full HD 1080P and 3D compatible.

Display Type



1 x 0,98" 2k 3-Chip DMD DLP
HD2K 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector	15000 / mit (CDXL-23S) , (CDXL-23SUP) Lampe	Screen	5000 Lux (200 cm Screen width)
Contrast	2000:1 full on/off		2000:1 full on/off
Black Level Offset	7,5000 min. Lumen		2,504 min. Lumen

Resolution

HD2K 2048 x 1080
2.211.840 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Media player formats: 2D up to 120 fps, 3D up to 60 fps/eye
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Christie Xenolite Lamp

Light Life

1000 h. bis 3500 h. je nach Lampentyp

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

Nein

Connections

Christie® CineLife+™ Series (Series-2 IMB compatible)
2x HDMI in
2x Display Port
4x 12G SDI
RS232C Din 9 pin in
RJ45 in
Remote UI

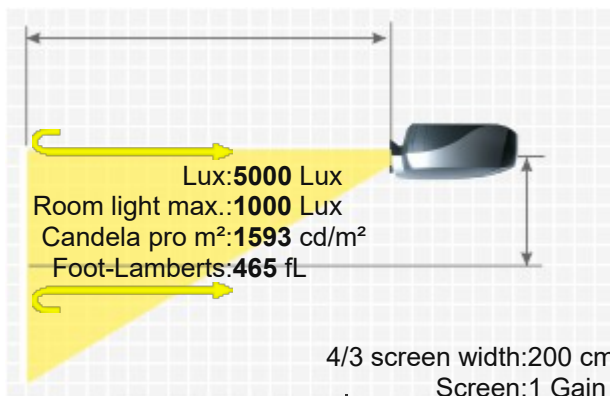



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
3200W
687 x 395 x 665 mm (27"x15,6"x26,2") 180,46 L/dm³
-

Weight
Keystone
Illumination

Frequenz

55,00 kg / 121,25 lbs.
-
-

-

Foot-Lamberts

Features

Screen Mirroring
Please note

465 fL / max. 1067 cm screen width
1593 cd/m²
■ Real Full HD 3D
■ Full HD 1080P compatible
■ Integrated Mediaplayer
■ Lan network compatible.
■ 003-006970-01
-
003-006970-01

Optional accessories


 Deckenhalterung HeavyDuty 378,28 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
3.90-6.52:1 Zoom Lens 108-323109-XX	3.9-6.52:1	7.8-13 m			Powered
2.40-3.90:1 Zoom Lens 108-322108-XX	2.4-3.9:1	4.8-7.8 m			Powered
1.9-3.0:1 Zoom Lens 108-328104-XX	1.9-3:1	3.8-6 m			Powered
1.75-2.40:1 Zoom lens 163-153100-XX	1.75-2.4:1	3.5-4.8 m			Powered
1.5-2.2:1 Zoom Lens 163-166104-XX	1.5-2.2:1	3-4.4 m			Powered
1.39-1.90:1 Zoom lens 163-152109-XX	1.39-1.9:1	2.8-3.8 m			Powered
1.20-1.75:1 Zoom Lens 108-350109-XX	1.2-1.75:1	2.4-3.5 m			Powered
Fix Optional Lenses					
1.05:1 Fixed Lens 108-319104-XX	1.05:1	2.1 m			No Zoom

Status
Data

2022 Current model // Last update of the data: 2025-09-09
Created: 2022-12-14 14:11:08



More Details

HCinema

<https://www.projector-database.com/pro/christiecp2415xe-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.