

Christie Matrix 3500

CHRISTIE MATRIX 3500



The stationary Matrix 3500 LCD projector from Christie has 3500 Ansi lumens, a contrast of 1000:1 and a UXGA 1600x1200 pixel resolution. The lamp life is specified by the manufacturer as 8000 hours, which converts to over 11 years at 2 hours per day. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 515 cm is possible, if the image width is smaller (we recommend max. 343 cm), rooms with residual light are also no problem. It was launched in 2004 and is no longer offered by the manufacturer Christie. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.

 3 x 1,8" LCD TFT Panel
UXGA 4/3 Liquid Crystal Display

Projector	3500 / 1750 im singel lamp Mode	Screen	1167 Lux (200 cm Screen width)
	1000:1 full on/off		1000:1 full on/off
	3,5000 min. Lumen		1,171 min. Lumen

Vert.: +/-50% Hori.: +/-12,5%

UXGA 1600x1200 Pixel
5760000 Pixel

Pal, Secam, NTSC, HDTV

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

4 x 100W UHP Lamp
Article Nr.: 03-000749-01P

8000 h.

-

Powered

Powered

optional

optional

2 x 3W Stereo

Input 1: DVI Input module for connections to digital computer sources with audio and control port
Input 2: 5 BNC Input module for connections to analog computer, component and HDTV sources
Input 3: Video Decoder module accepts composite video and S-video



Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio


Audio

Connections

from VCR, DVD, Laser Disc players and video Kameras and automatically Yes, is possible.

Ceiling Mounting
Power
Size WxHxD
Operating Noise

-
581 x 251 x 783 mm (22,9"x9,9"x30,8") 114,19 L/dm³
-

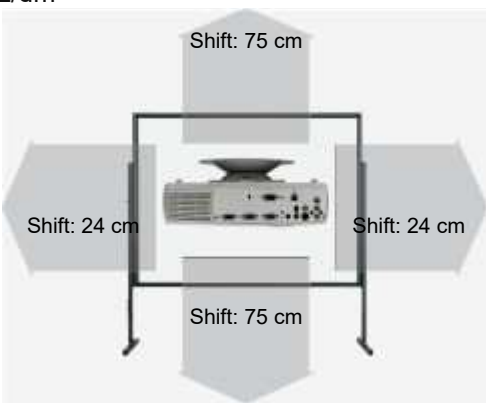

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts
Features
Screen Mirroring

37,00 kg / 81,57 lbs.
Vert.: +/-40°
-
H-sync: 15-120 kHz
V-sync: 50-120 Hz
Range max.: 230 MHz
108 fL / max. 515 cm screen width
370 cd/m²
■ Lens shift Funktion
■ Freeze
■ Kensington Slot
■ Gamma correction
■ Password protection
■ Remote control with laser pointer und mouse control
■ Digital Zoom x49.
■ RJ45 via RS232C module optional
-

Optional accessories

	Einzel Lampe Original	03-000749-01P	EOL €
	Deckenhalterung	HeavyDuty	470,94 €
	Luftfilter universal	uni3mm	18,15 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
6.3-9.0:1	6.27-9.15:1	1254-1830 m	45-50%	+/-7.5%	Manual
4.6-6.0:1	4.5-6.32:1	900-1264 m	45-60%	15-7.5%	Powered
3.5-4.6:1	3.51-4.58:1	702-916 m	47.5-55%	+/-10%	Powered
2.6-3.5:1	2.57-3.47:1	514-694 m	+/-52.5%	+/-10%	Powered
2.0-2.6:1	2.04-2.68:1	408-536 m	+/-50%	+/-10%	Powered
1.5-2.0:1	1.58-2.06:1	316-412 m	+/-50%	+/-9.5%	Powered
1.35-1.8:1	1.4-1.86:1	280-372 m	+/-50%	+/-12.5%	Powered
0.8:1	0.8:1	160 m	0.0% Fix	+/-12.5%	No Zoom
1.2:1	1.19:1	238 m	+/-50%	+/-12.5%	No Zoom
7.0:1	7.03:1	1406 m	+/-44.5%	15-7.5%	No Zoom

Status 2004 Discontinued (EOL) // Last update of the data: 2026-05-05

Data



More Details



HCinema

<https://www.projector-database.com/pro/christiematrix3500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.