


Christie Mirage 5000



CHRISTIE MIRAGE 5000



Brief Introduction

Beta 2.5

With the Mirage 5000, manufacturer Christie offers a stationary DLP projector with SXGA 1280 x 1024 resolution and a contrast of 450:1 250:1 according to Ansi. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 5000 Ansi lumens, a picture width of 599 cm is possible. The projector will also work with slightly brighter rooms with a smaller image width (we recommend max. 399 cm). It is no longer offered by the manufacturer Christie. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.



3 x DLP Chip
SXGA 5/4 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

5000

1517 Lux (bei 203 cm Screen)

Contrast

450:1 full on/off 250:1 nach Ansi

450:1 full on/off 250:1 nach Ansi

Black Level

11,1111 min. Lumen

3.396 min. Lumen

Lens shift

Vert.: +64% -50% Hori.: +/-13,5% motorisch max.

SXGA 1280 x 1024

Resolution

1.310.720 Pixel

UXGA 1600 x 1200 compressed

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43 DTV und HDTV kompatibel

3D Compatibility

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

1200W Xenon Lamp

Articel Nr.: 03-000457-06P

Light Life

1000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

No

Connections

5 x BNC RGBHV in

RS232C

RS422

optional weitere Module

Ceiling Mounting

Yes

Power

1700W

Size WxHxD

648 x 302 x 766 mm (25,5"x11,9"x30,2") 149,9 L/dm³

Operating Noise

-

Weight


41,80 kg / 92,15 lbs.

Keystone

-

Illumination

90%

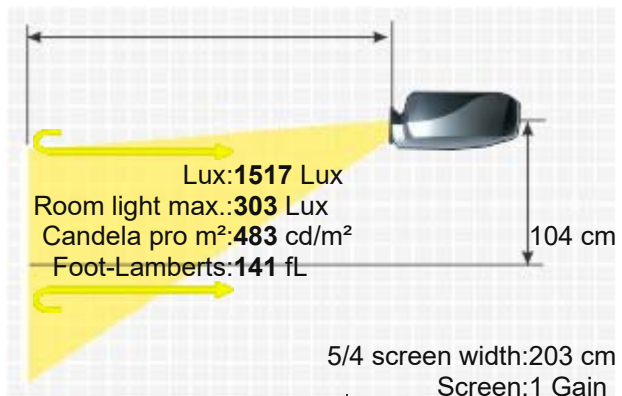

Frequenz
H-sync: 15-120 kHz
V-sync: 24-120 Hz
Range max.: 160 MHz

Foot-Lamberts
141 fL / max. 599 cm screen width
483 cd/m²

- Features
- Lens shift Funktion motorisch max.
 - Freeze
 - Kensington Slot
 - Gamma correction
 - Password protection
 - Digital Zoom
 - 100 channel memory
 - 3D images with only one projector
 - Intelligent LCD diagnostic display
 - RJ45 via RS232C module optional



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Christie 4.0-7.0:1	4.12-7.17:1	8.4-14.6 m	65-50%	+/-13.5%	Powered
Christie 2.2-4:1	2.32-4.15:1	4.7-8.4 m	64-50%	+/-13.5%	Powered
Christie 1.5-2.25:1	1.61-2.27:1	3.3-4.6 m	64-50%	+/-13.5%	
Fix Optional Lenses					
Christie 1.2:1	1.36:1	2.8 m	54-50%	+/-13.5%	No Zoom
Christie 0.8:1	0.91:1	1.9 m	45.5-50%	+/-13.5%	No Zoom

Status
Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/christiemirage5000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.