

Christie WX7K-M

CHRISTIE WX7K-M



Manufacturer Christie offers the WX7K-M, a stationary DLP projector with WXGA 1366 x 768 resolution and a contrast ratio of 10000:1. The lens shift function allows the projector to be positioned very freely. 5700 ANSI lumens ensure that an image width of 767 cm is also possible. The projector can handle rooms with residual light with a smaller image width; we would recommend a maximum of 511 cm. If the image is still too small, the projector offers integrated edge blending software, which allows multiple projectors to project a large image together. Even 1080P video signals are no problem for the projector. The model was built by Christie in 2009 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,85" DLP Chip
WXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

5700 / 2850 im singel Lamp Mode
10000:1 full on/off
0,5700 min. Lumen
Vert.: +/-75% Hori.: +/-38%

2533 Lux (bei 200 cm Screen)
10000:1 full on/off
0,253 min. Lumen

WXGA 1366 x 768
1.049.088 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

2 x 200W P-VIP Lamp

Article Nr.: 003-100856-01

2000 h. 3000 h. in eco Mode

23,34% / 0,81 €

Powered

Powered

optional

optional

Nein

RS232 in/out

RS422 In


Ethernet (10/100)

Yes, is possible.

870W

561 x 259 x 500 mm (22,1"x10,2"x19,7") 72,65 L/dm³

-

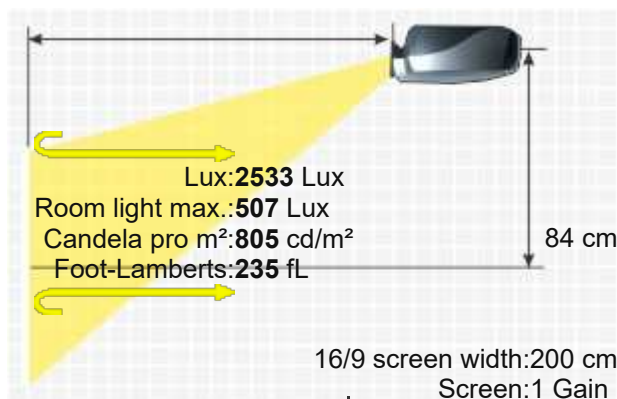

Weight

25,00 kg / 55,12 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15-120 kHz

V-sync: 23,97-150 Hz

Range max.: 165 MHz

Foot-Lamberts

235 fL / max. 767 cm screen width

805 cd/m²

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Freeze

■ Eco Mode

■ Kensington Slot

■ Gamma correction

Features

■ Dynamic iris

■ Digital image shift

■ Edge Blending

■ Picture-in-Picture

■ Password protection

■ Remote control with laser pointer


■ Crestron®-Software compatible.

Screen Mirroring

-

In Test

-

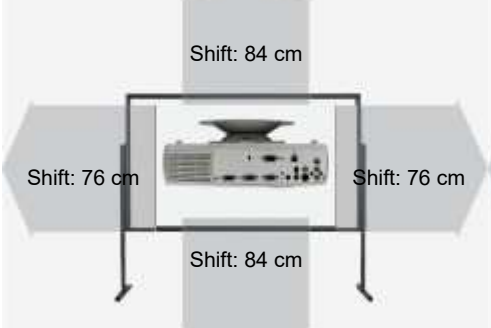

Optional accessories			
	Nackte Osram Lampe	NLMP18816	76,15 €
	Lampe Original	003-100856-01 / 003-100856-02	808,62 €
	Rauch-Luftfilter Original	118-100105-01	166,54 €
	ASSY Rauchfilter Kit Original	118-100104-01	434,05 €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
6.9-10.4:1	6.9-10.4:1	13.8-20.8 m	+/-75%	+/-38%	Powered
4.1-6.9:1	4.1-6.9:1	8.2-13.8 m	+/-75%	+/-38%	Powered
2.6-4.1:1	2.6-4.1:1	5.2-8.2 m	+/-75%	+/-38%	Powered
1.8-2.6:1	1.8-2.6:1	3.6-5.2 m	+/-75%	+/-38%	Powered
1.4-1.8:1	1.4-1.8:1	2.8-3.6 m	+/-75%	+/-38%	Powered
1.16-1.49:1	1.16-1.49:1	2.3-3 m	+/-60%	+/-28%	Powered
Fix Optional Lenses					
1.1:1HD	1.1:1	2.2 m	+/-75%	+/-38%	No Zoom
0.67:1	0.67:1	1.3 m	+/-25%	+/-9%	No Zoom

Status2009 Discontinued (EOL) // Last update of the data: 2025-03-03



