

Compaq MP 1600



COMPAQ MP 1600



Brief Introduction

Beta 2.5

The standard portable MP 1600 DLP has 600 Ansi lumens, a contrast of 400:1 and a resolution. 600 Ansi lumens ensure that a picture width of 213 cm is also possible. However, if room light is available, the picture should be max. 142 cm wide. This model is no longer offered by Compaq.



1 Chip DLP
4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

600

194 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

1,5000 min. Lumen

0.489 min. Lumen

Offset

-

Resolution

-

Video Modes

NTSC, PAL, SECAM, NTSC 4.43

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

- Lamp

Articel Nr.: L1550a

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

8W

Connections

-

Ceiling Mounting

Yes

Power


-

Size WxHxD

62 x 209 x 228,4 mm (2,4"x8,2"x9") 2,95 L/dm³

Operating Noise

40dB

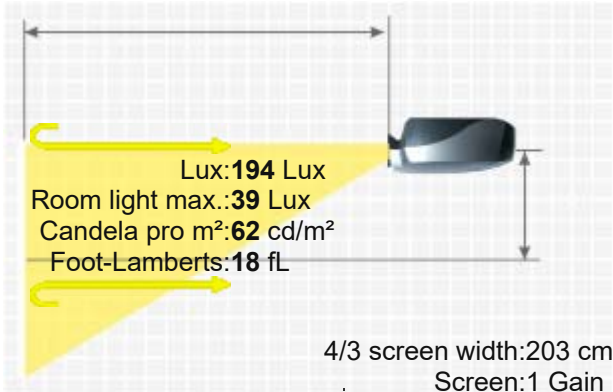

Weight

1,90 kg / 4,19 lbs.

Keystone

-

Illumination

90%

Frequenz

-

Foot-Lamberts

18 fL / max. 213 cm screen width
62 cd/m²

Features

■ Picture-in-Picture

In Test

-

Optional	Osram bulb only	NLMP994
	Osram bulb only	NLMP994
	Lamp ruby	Ruby-LMP994
	Lamp ruby	Ruby-LMP994
	Lamp original	L1550A
	Lamp original	L1550A
	Compatible lamp	LMP-K15606
	Compatible lamp	LMP-K15606
	Universal Remote original	Fernb-uni-V3

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n994>
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/compaqmp1600-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.