

Davis Powerbeam II

DAVIS POWERBEAM II

A brief introduction to the Powerbeam II: The Davis LCD projector offers 500 Ansi lumens, a contrast of 100:1 and a VGA 640 x 480 resolution. The projector will be able to illuminate an image width of 195 cm well. However, if room light is available, the image width should ideally not exceed 130 cm. The model is no longer offered by Davis. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.

 1 x 8,4 LCD TFT Panel
VGA 4/3 Liquid Crystal Display

500 162 Lux (bei 203 cm Screen)
100:1 full on/off 100:1 full on/off
5,0000 min. Lumen 1.67 min. Lumen

VGA 640 x 480

307.200 Pixel

NTSC, PAL, NTSC 4,43

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

575W Metaldampf Lamp

Articel Nr.: 2940050

1000 h.

-

Manual

No Zoom

-

-

2 x 12W

Cinch Video in
S Video Eingang

-

-

-

-

-

-

-

H-sync: 15,0-35,0 kHz

V-sync: 50-90 Hz


15 fL / max. 195 cm screen width

51 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

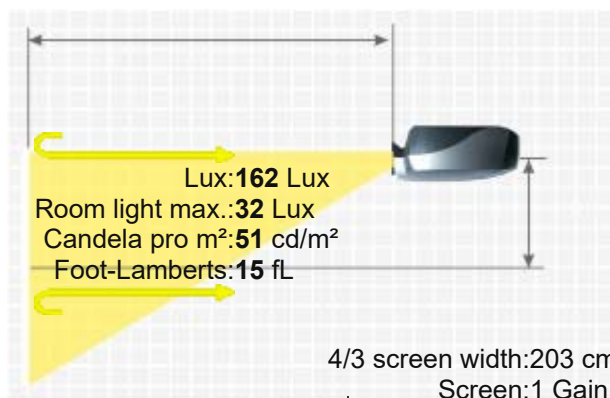

HCinema

<https://www.projector-database.com/pro/davispowerbeam2-en.html>

More Details