

Dukane ImagePro 6860WSS

DUKANE IMAGEPRO 6860WSS



The ImagePro 6860WSS 3D laser DLP has 6000 Ansi lumens, a contrast of 10000:1 and a WXGA 1280 x 800 resolution. The lifespan of the laser is 20000 hours, which is equivalent to over 13.7 years at 4 hours per day. With the lens shift function, the projector can be positioned very freely. An image width of up to 787 cm is possible as the projector has 6000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 525 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Furthermore, the projector can play 1080P and 4K (compressed) as well as 3D without any problems, and therefore all currently available Blu-ray formats can be recognized by the projector. The model built in 2014 is no longer offered by Dukane.



1 x 0,65" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Projector

6000
10000:1 full on/off
0,6000 min. Lumen
Vert.: +/-50% Hori.: +/-15%
WXGA 1280 x 800

Screen

2400 Lux (bei 200 cm Screen)
10000:1 full on/off
0,24 min. Lumen

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

1.024.000 Pixel
HD4K 4096 x 2160 compressed
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Very large screen width and rooms with plenty of light and shaded daylight.
Laser Light Source
20000 h.

0,00 € Laser


Powered

Powered

optional

optional

Nein

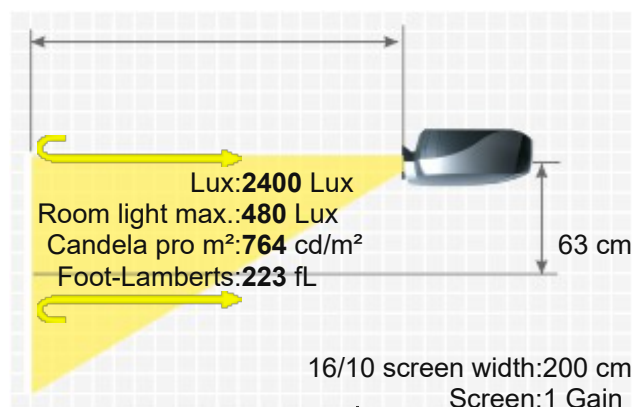

Brief Introduction

Beta 2.5

HDMI in und out
D-sub 15pin in und out
5 x BNC RGBHV in
S-Video über BNC in
BNC Video in
Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 mit HDBaseT in
3D SYNC



Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
530W
484 x 195 x 509 mm (19,1"x7,7"x20") 48,04 L/dm³
38dB

Weight
Keystone
Illumination

18,50 kg / 40,79 lbs.
Vert.: +/-40°
Hori.: +/-40°
-

Frequenz

-

Foot-Lamberts


223 fL / max. 787 cm screen width
764 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- User logo
- Eco Mode
- 360° installable
- Edge Blending
- Password protection
- Remote control with backlight
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.
- Picture-in-picture
- Picture-and-picture
- DICOM simulation;

Features

Screen Mirroring

-

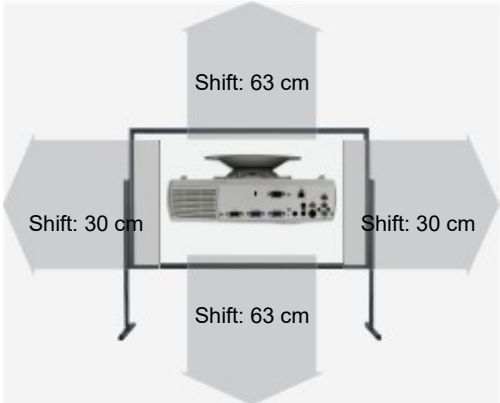

Optional accessories

	Objektiv Original	100013847 / NP37ZL	3.576,32 €
	Objektiv Original	100013844 / NP34ZL	EOL €
	Objektiv Original	100013846 / NP36ZL	1.264,65 €
	Objektiv Original	100013763 / NP35ZL	2.717,31 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP37ZL	1.61-3.08:1	3.2-6.2 m	+/-50%	+/-15%	Powered
NP36ZL	1.29-1.61:1	2.6-3.2 m	+/-50%	+/-15%	Powered

NP35ZL	1.29-1.61:1	2.6-3.2 m	+/-50%	+/-15%	Powered
NP34ZL	1.01-1.29:1	2-2.6 m	+/-50%	+/-15%	Powered

Status 2014 Discontinued (EOL) // Last update of the data: 2025-03-03

Data Created: 2016-08-17 11:04:21

More Details



HCinema
<https://www.projector-database.com/pro/dukaneimagepro6860wss-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.