

Dukane ImagePro 7100HC



DUKANE IMAGEPRO 7100HC



Brief Introduction

Beta 2.5

Display Type



1 Chip 0,55" DDR DLP
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 1000

Screen 324 Lux (bei 203 cm Screen)

Contrast

2000:1 full on/off

Screen 2000:1 full on/off

Black Level

Offset 0,5000 min. Lumen

Screen 0.162 min. Lumen

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

NTSC, PAL, SECAM, EDTV, HDTV (1080i und 720p RGBHV)

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W SHP Lamp

Light Life

Articel Nr.: I-PRO 7100HC

3000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,19

Objective

F=2,4 f=21-25 mm

Throw Ratio

1,9-2,3:1

Audio

2,5W Mono

Connections

D-sub 15pin in und out

S-Video 6-pin mini DIN

Cinch Video in

Minijack in

USB in



Ceiling Mounting

Yes

Power


200 / 250W maximum

Size WxHxD

249 x 106 x 318 mm (9,8"x4,2"x12,5") 8,39 L/dm³

Operating Noise

37dB

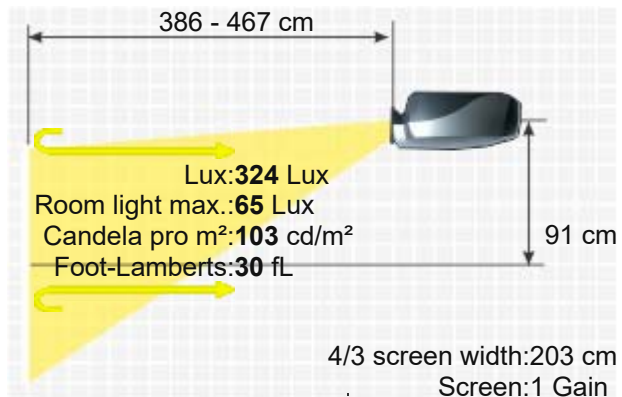

Weight

3,10 kg / 6,83 lbs.

Keystone

Vert.: +/-20°

Illumination

-

Frequenz H-sync: 31,5-80 kHz
V-sync: 50-85 Hz
Range max.: 95 MHz

Foot-Lamberts 30 fL / max. 275 cm screen width

103 cd/m²



- Features
- Freeze
 - Blank (Black screen button)
 - Remote control with mouse control
 - Overscan adjustable
 - 4-segment colour wheel RGBW white can be activated.
 - YUV signal via adapter
 - Overscan adjustable 96/99 per cent.
 - Three user memories
 - DCDi DE-interlacer with film mode detection from Faroudja.
 - Freeze frame
 - Digital zoom
- Status Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro7100hc-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.