

Dukane ImagePro 8000

DUKANE IMAGEPRO 8000

The standard portable Dukane ImagePro 8000 LCD projector has 300 Ansi lumens, a contrast of 100:1 and a VGA 640 x 480 resolution. Due to the brightness of 300 Ansi lumens, a picture width of 151 cm is possible. In room light, the picture should be max. 101 cm wide. The model is no longer offered by Dukane.



LCD TFT Panel
VGA 4/3 Liquid Crystal Display

Projector

300
100:1 full on/off
3,0000 min. Lumen

Screen
97 Lux (bei 203 cm Screen)
100:1 full on/off
1 min. Lumen

VGA 640 x 480
307.200 Pixel

NTSC, PAL, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

575W Metaldampflampe

Articel Nr.: 456-189

750 h.

-

Manual

No Zoom

-

-

2 x 2,5W

S-Video: (1) Mini DIN 4-pin
Video: (1) RCA jack
D-sub 15pin in

-

650W

-

-

-

-

-


-

9 fL / max. 151 cm screen width
31 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

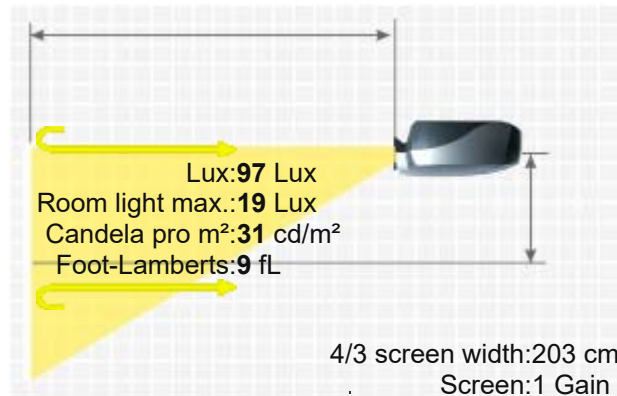

HCinema

<https://www.projector-database.com/pro/dukaneimagepro8000-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.