

Dukane ImagePro 8038



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Screen Mirroring

The Dukane ImagePro 8038 LCD projector has 870 Ansi lumens, a contrast of 200:1 and an SVGA 800 x 600 resolution. As Dukane specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. An image width of up to 257 cm is possible. In room light, however, the image should be smaller. We recommend max. 171 cm. The projector is no longer sold by the manufacturer.



3 x 0,9" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

870 1000 Lumen

200:1 full on/off

4,3500 min. Lumen

Screen

290 Lux (200 cm Screen width)

200:1 full on/off

1,472 min. Lumen

-

SVGA 800 x 600

480.000 Pixel

NTSC, PAL, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

120W UHP Lamp

2000 h.

-

Manual

No Zoom

-

-

2 x 2W

1) Computer 15 pin subD VGA

(1) S-video, mini DIN 4 pin

(1) Composite video, RCA

(1) Audio in, 1/8" mini plug, stereo

-

195W

-

42dB

-

-

-

H-sync: 30-90 kHz


V-sync: 56-85 Hz

27 fL / max. 257 cm screen width

93 cd/m²

■ Kensington Slot

-

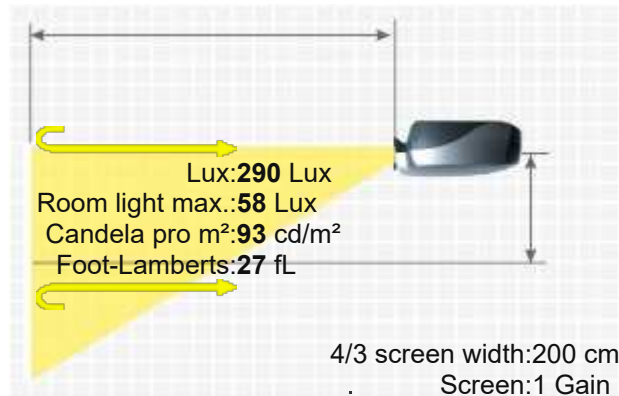

Optional accessories



Luftfilter universal

uni3mm

18,15 €

Status
Data

- Discontinued (EOL) // Last update of the data: 2025-11-22



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8038-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.