

Dukane ImagePro 8949H



DUKANE IMAGEPRO 8949H



Brief Introduction

Beta 2.5

The Dukane ImagePro 8949H stationary LCD projector has 4000 Ansi lumens, a contrast of 1000:1 and a WXGA 1280 x 800 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 4000 Ansi lumens ensure that a picture width of 643 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 429 cm. It is also Full HD 1080P compatible. This model is no longer offered by Dukane.

 3 x 0,75" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Display Type

Ansi-Lumen

Projector 4000 / 3200 im Eco Mode

Screen 1600 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

4,0000 min. Lumen

1,604 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10%

Resolution

WXGA 1280 x 800

1.024.000 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

275W UHB Lamp

Articel Nr.: 456-8949H

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-1,9 f=24-29 mm

Throw Ratio

1,5-1,8:1

Audio

2 x 4W


HDMI in
2 x Dsub 15 pin in 1 x out
5 x BNC RGBHV in
YUV in
S-Video in
Cinch Video in
3 x Cinch Stereo in 1 x out
Mini Jack Audio in
RS232C Din 9pin in
USB Typ B

Connections



Ceiling Mounting

Yes

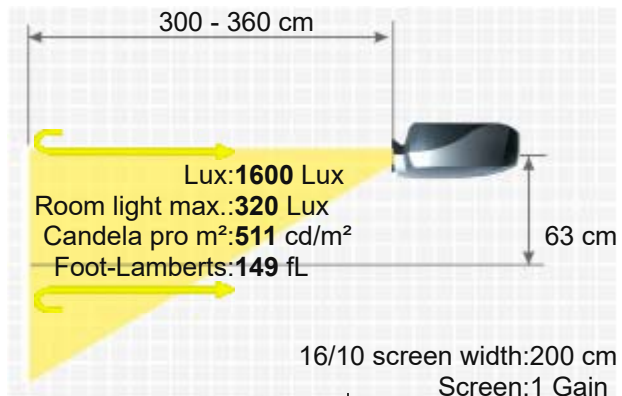

Power 460W
Size WxHxD 418 x 139 x 319 mm (16,5"x5,5"x12,6") 18,53 L/dm³
Operating Noise 35 / 29 dB in Eco Mode


Weight 7,10 kg / 15,65 lbs.
Keystone Vert.: +/-40°
Hori.: +/-20°

Illumination -

Frequenz H-sync: 31,5-106 kHz
V-sync: 56-120 Hz

Foot-Lamberts 149 fL / max. 643 cm screen width
511 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with mouse control
- Overscan adjustable

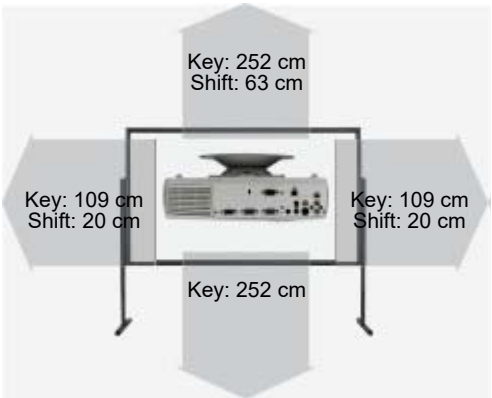

Features

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
UL-604	4-7.48:1	8-15 m	40%	+/-10%	Manual
SL-602	1.25-2.01:1	2.5-4 m	40%	+/-10%	Manual
LL-603	2.04-3.93:1	4.1-7.9 m	40%	+/-10%	Manual
Fix Optional Lenses					
FL-601	0.79:1	1.6 m	0.0% Fix		No Zoom

Status Data 2008 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8949h-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.