

Dukane ImagePro 9001

DUKANE IMAGEPRO 9001



The Dukane ImagePro 9001 model is a DILA projector with SXGA+ 1365 x 1024 resolution and a contrast of 250:1. The brightness of 1000 Ansi lumens enables an image width of 275 cm. In room light, the picture should be max. 183 cm wide. It is no longer offered by the manufacturer Dukane.



3 x 0,9 D-ILA

SXGA 4/3 Direct-Drive Image Light Amplification (D-ILA)

Projector
1000
250:1 full on/off
4,0000 min. Lumen

Screen
333 Lux (bei 200 cm Screen)
250:1 full on/off
1,348 min. Lumen

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

-
SXGA+ 1365 x 1024
1.397.760 Pixel

NTSC, PAL, MPAL, NPAL, PAL60, SECAM, Component, 480i, 575k, 480p, 1080i, 720p, HDTV
Standard-Portabel | External training and company presentations, as well as product
presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

400W Xenon Lamp

Articel Nr.: I-PRO 9001

1000 h.

Powered

Powered

-

-

2 x 2W

Cinch Video in

S-Video in

D-sub 15pin in

Yes

630W

-

-

-

-

-

H-sync: 15,0-82,0 kHz


V-sync: 50-78 Hz

31 fL / max. 275 cm screen width

106 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

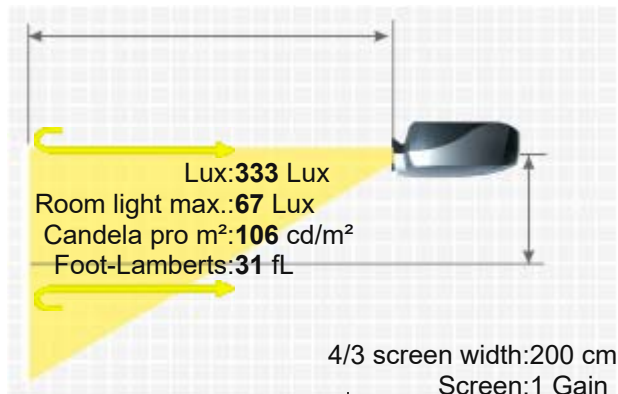

HCinema

<https://www.projector-database.com/pro/dukaneimagepro9001-en.html>

More Details