

Dukane ImagePro 9080WUSS

DUKANE IMAGEPRO 9080WUSS



The ImagePro 9080WUSS 3D laser DLP projector from Dukane has 8000 Ansi lumens, a contrast of 20000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer specifies a laser service life of 20000 hours, which is over 13.7 years if enjoyed for four hours a day. Including a lens shift and keystone correction function, which provides freedom during installation. 909 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, max. 606 cm is recommended here. In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. It is also Full HD 1080P compatible and even has the option of projecting HD 1080P Blu-rays onto the ceiling using 360° projection. It was launched in 2016 and is no longer offered by the manufacturer Dukane.



1 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

8000

20000:1 full on/off

0,4000 min. Lumen

Vert.: +60% -22% Hori.: +/-20%

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h.

0,00 € Laser

Powered

Powered 1,5

-

2,4-3,6:1

3556 Lux (bei 200 cm Screen)

20000:1 full on/off

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen


0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

0,178 min. Lumen

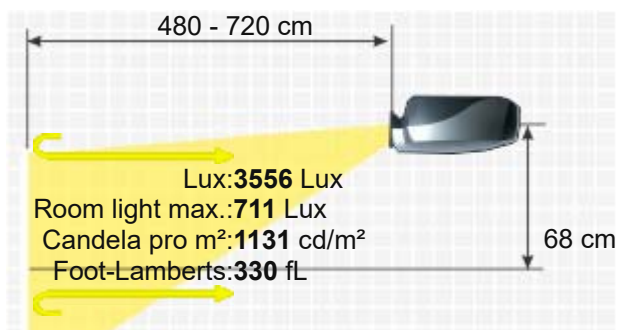

- Connections
- 2 x HDMI in

DVI-D in

D-sub 15pin in und out

5 x BNC RGBHV in

USB in

RS232C Din 9 pin in

RJ45 in

HDBaseT in

3G-SDI in und out

12V Trigge rout



- Ceiling Mounting
- Yes
- Power
- 885 / 845W in Eco Mode
- Size WxHxD
- 500,4 x 215,9 x 576,6 mm (19,7"x8,5"x22,7") 61,92 L/dm³
- Operating Noise
-

- Weight
- 27,99 kg / 61,71 lbs.
- Keystone
- Vert.: +/-60°
- Hori.: +/-40°
- Illumination
-
- Frequenz
- H-sync: 15-106 kHz
- V-sync: 50-120 Hz
- Range max.: 150 MHz
- Foot-Lamberts
- 330 fL / max. 909 cm screen width
- 1131 cd/m²

- Full HD 1080P compatible

■ Lens shift Funktion

■ Eco Mode

■ Dynamic iris

■ Warping

■ 360° installable

■ 24/7 continuous operation capable

■ Edge Blending

■ Picture-in-Picture

■ PJLink™

■ Lan network compatible.


■ Crestron®-Software compatible.

■ DICOM simulation.

Features

Optional Lenses

- Status
- 2016 Discontinued (EOL) // Last update of the data: 2024-10-02
- Created: 2016-05-17 09:56:19

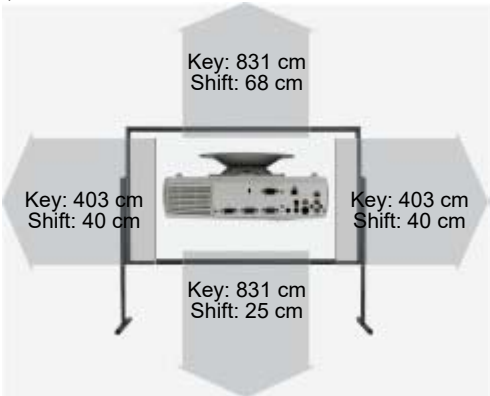

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro9080WUSS-en.html>