

Eiki EK-510U/L

EIKI EK-510U/L



The EK-510U/L LCD projector from Eiki has 7000 Ansi-Lumen, a contrast of 2500:1 and a WUXGA 1920 x 1200 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 850 cm is possible, if the image width is smaller (we recommend max. 567 cm), rooms with residual light are also no problem. If the image is still too small, the integrated edge blending software can help to project a large image with additional projectors. Even 1080P video signals are no problem for the projector. It was launched in 2017 and is no longer offered by the manufacturer Eiki, but is still very popular in our projector database.

 3 x 0,67" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Projector 7000
2500:1 full on/off
2,8000 min. Lumen
Screen 3111 Lux (bei 200 cm Screen)
2500:1 full on/off
1,246 min. Lumen

Vert.: +/-60% Hori.: +/-30%

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

430W Lamp

Articel Nr.: 23040055 / 22040005

3000 h.

-

Powered

Powered 1,8

F=1,8-2,6 f=24-43,20 mm

1,47-2,65:1

10W

HDMI in

D-sub 15pin in

S-Video in

Mini Jack Audio in und out

USB in

RS232C Din 9 pin in

HDBaseT in

Yes

580W


474 x 177 x 412 mm (18,7"x7"x16,2") 34,57 L/dm³

40 / 34 dB in Eco Mode

9,70 kg / 21,38 lbs.

Vert.: +/-30°

Hori.: +/-15°

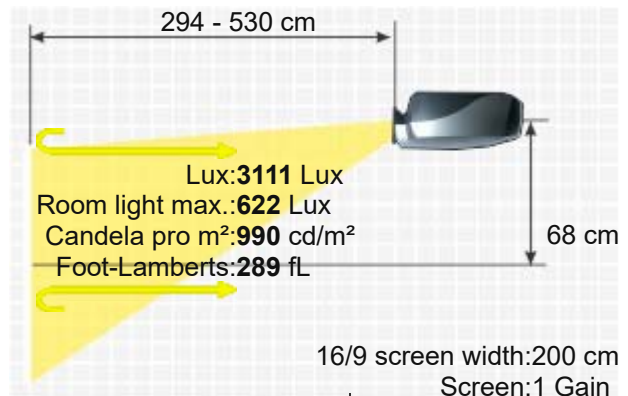

Illumination -
 Frequenz -
 Foot-Lamberts 289 fL / max. 850 cm screen width
 990 cd/m²
 ■ Full HD 1080P compatible
 ■ Lens shift Funktion
 ■ Eco Mode
 Features
 ■ Edge Blending
 ■ Remote control with laser pointer
 ■ Lan network compatible.
 ■ DICOM simulation mode



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-E23020	4.31-7.33:1	8.6-14.7 m	+/-60%	+/-30%	Powered
AH-E23010	2.8-4.53:1	5.6-9.1 m	+/-60%	+/-30%	Powered
AH-E22020	1.18-1.53:1	2.4-3.1 m	+/-60%	+/-30%	Powered
AH-E21010	1.47-2.65:1	2.9-5.3 m	+/-60%	+/-30%	Powered
Fix Optional Lenses					
AH-E22010	0.76:1	1.5 m			No Zoom

Status 2017 Discontinued (EOL) // Last update of the data: 2023-08-04
 Created: 2017-02-16 15:22:47



HCinema

<https://www.projector-database.com/pro/eikiek510u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.