

Eiki LC W4

EIKI LC W4



With the LC W4, manufacturer Eiki offers a stationary LCD projector with WXGA 1366 x 768 resolution and a contrast of 900:1. With the lens shift function, the projector can be positioned very freely. The projector can illuminate a screen width of up to 697 cm thanks to its 4700 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 465 cm. On the market since 2006, the model is no longer offered by the manufacturer Eiki, but is still a popular projector in our database.

Brief Introduction

Beta 2.5

Display Type



3 x 1,21" LCD TFT Panel
WXGA 16/9 Liquid Crystal Display

Ansi-Lumen

4700

2089 Lux (bei 200 cm Screen)

Contrast

900:1 full on/off

900:1 full on/off

Black Level

5,2222 min. Lumen

2,327 min. Lumen

Lens shift

Vert.: +/-80% motorisch max.

Resolution

WXGA 1366 x 768

1.049.088 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

2 x 250W UHP Lamp

Articel Nr.: 610 309 3802

Light Life

1500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

2 x 3W

Connections

DVI-I
5 x BNC RGBHV in
S-Video in
Fbas über BNC
Cinch Stereo in
USB in
RS232C Din 9pin

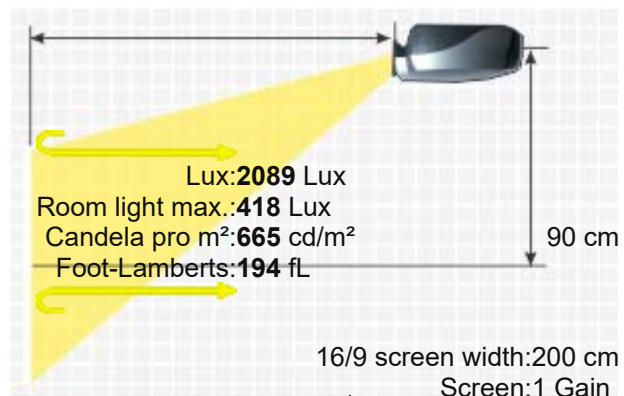



Ceiling Mounting Yes
 Power 700W
 Size WxHxD 439 x 230 x 606 mm (17,3"x9,1"x23,9") 61,19 L/dm³
 Operating Noise 46dB

Weight 21,00 kg / 46,3 lbs.

Keystone Hori.: +/-10°

Illumination 90%

Frequenz H-sync: 15-120 kHz

V-sync: 50-120 Hz

Range max.: 230 MHz

Foot-Lamberts 194 fL / max. 697 cm screen width

665 cd/m²

■ Lens shift Funktion motorisch max.

■ Freeze

■ Kensington Slot

■ Gamma correction

■ Remote control with laser pointer und mouse control

■ Digital Zoom

■ De-interlacer with 3:2 pull down.

Bulb only Osram

NLMP3484

Lamp ruby

Ruby-LMP3484

Lamp original

610-309-3802 / LMP73 / ET-SLMP73

Compatible lamp

LMP-K3484

Universal Remote original

Fernb-uni-V3

Remote control original

645 066 7541 / CXRP

Air filter A bottom original

910 292 3163

Air filter C left original

910 292 3187

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n4581>



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Eiki AH-32601 (W06)	1.65-2.15:1	3.3-4.3 m	+/-80%		Powered
Eiki AH-32581 (T03)	8.44-12.37:1	16.9-24.7 m	+/-66.6%		Powered
Eiki AH-32501 (W05)	1.32-1.85:1	2.6-3.7 m	+/-50%		Powered
Eiki AH-32401 (W04)	2.17-2.84:1	4.3-5.7 m	+/-80%		Powered
Eiki AH-22051(S03)	3.65-4.92:1	7.3-9.8 m	+/-66.6%		Powered
Eiki AH-21202 (W02Z)	1.96-2.55:1	3.9-5.1 m	+/-66.6%		Powered
Eiki AH-21102 (S02Z)	2.84-3.7:1	5.7-7.4 m	+/-80%		Powered
Eiki AH-21091 (T02)	6.03-8.43:1	12.1-16.9 m	+/-66.6%		Powered
Eiki AH-21022 (M01Z)	4.74-6.14:1	9.5-12.3 m	+/-66.6%		Powered
Fix Optional Lenses					
Eiki AH-32701 (W07)	0.77:1	1.5 m	0.0% Fix		No Zoom
Eiki AH-32021 (W03)	1.2:1	2.4 m	0.0% Fix		No Zoom
Eiki AH-21032 (T01Z)	9.57:1	19.1 m	+/-66.6%		No Zoom
Eiki AH-21012 (W01Z)	1.68:1	3.4 m	+/-66.6%		No Zoom

Status 2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/eikilcw4-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.