

Eiki LC X1/L/A



EIKI LC X1/L/A



Brief Introduction

Beta 2.5

The stationary LC X1/L/A LCD has 2100 Ansi lumens, a contrast of 300:1 and an XGA 1024 x 768 resolution. The manufacturer Eiki specifies a service life of 750 hours, which is over 1 year with a daily viewing time of 2 hours. The built-in lens shift function provides freedom when setting up. Thanks to the brightness of 2100 Ansi lumens, a picture width of 399 cm is possible. In room light, the picture should be max. 266 cm wide. It was launched in 1998 and is no longer offered by the manufacturer Eiki, but is still a very popular projector.

Display Type



3 x 1,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector 2100

Screen 700 Lux (200 cm Screen width)

Contrast

300:1 full on/off

300:1 full on/off

Black Level

7,0000 min. Lumen

2,357 min. Lumen

Lens shift

Vert.: +/-50%

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL/SECAM/NTSC/NTSC4.43

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

400W Metalldampf Lamp

Article Nr.: 610-283-5175

Light Life

750 h.

Operating Costs

0,91% / 0,03 €

Focus

Powered

Zoom

Powered 1,6

Objective

F=2,6-3,5 / L optional

Throw Ratio

1,8-2,9:1

Audio

-

Connections

Computer input HDB15
Computer input BNC x 5
Computer audio input x 2
Computer output HDB15
Composite Video (Y, B-Y, R-Y) x 2
S-Video input x 2
S-Video output
Computer audio output
Serial port (RS232C)
USB port x 2

Ceiling Mounting

Yes, is possible.

Power


630W

Size WxHxD


390 x 233,6 x 581,5 mm (15,4"x9,2"x22,9") 52,8 L/dm³

Operating Noise

-

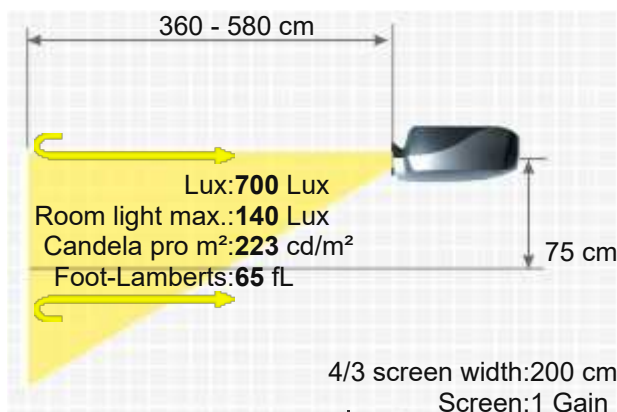

Weight	17,30 kg / 38,14 lbs.
Keystone	-
Illumination	85%
Frequenz	H-sync: 15-80 kHz V-sync: 50-100 Hz Range max.: 135 MHz
Foot-Lamberts	65 fL / max. 399 cm screen width 223 cd/m²
Features	Lens shift Funktion Freeze Remote control with mouse control
Screen Mirroring	-

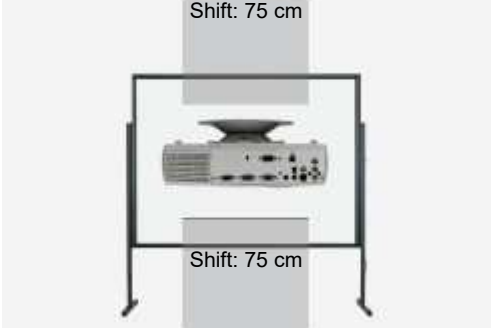

Optional accessories

	Lampe Original	610-290-7698 / LMP15 / ET-SLMP15	EOL €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung 220	Halterung45	83,60 €
	Luftfilter universal	uni3mm	18,15 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
(T03)	6.2-9.1:1	1240-1820 m	+/-40%		Powered
0001-4168A	5.08-8.47:1	1016-1694 m	+/-40%		Manual
0001-4166A	4.13-6.19:1	826-1238 m	+/-40%		Powered
AH-21091 (T02)	4.28-5.99:1	856-1198 m	+/-40%		Powered
0001-4167A	3.14-5.02:1	628-1004 m	+/-40%		Manual
AH-21022 (M01Z)	3.37-4.38:1	674-876 m	+/-40%		Powered
(S03)	2.6-3.5:1	520-700 m	+/-40%		Powered
AH-21041 (S01)	1.82-2.92:1	364-584 m	+/-50%		Powered
AH-21102 (S02Z)	2.05-2.64:1	410-528 m	+/-50%		Powered
AH-21202 (W02Z)	1.41-1.84:1	282-368 m	+/-40%		Powered
AH-21032 (T01Z)	6.88:1	1376 m	+/-40%		No Zoom
AH-21012 (W01Z)	1.21:1	242 m	+/-40%		No Zoom
AH-32021 (W03)	0.81:1	162 m	0.0% Fix		No Zoom
0001-4191	1.03:1	206 m	0.0% Fix		No Zoom
0001-4224	1.45:1	290 m	0.0% Fix		No Zoom
0001-4230	9.64:1	1928 m	+/-40%		No Zoom

Status 1998 Discontinued (EOL) // Last update of the data: 2026-06-09
Data

More Details



HCinema
<https://www.projector-database.com/pro/eikilcx1-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.