

Eiki LC XG400/L

EIKI LC XG400/L



A brief introduction to the LC XG400/L: The Eiki stationary LCD projector offers 5000 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. Includes a lens shift and keystone correction function, which provides freedom during installation. 616 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, max. 411 cm is recommended here. The model built in 2007 is no longer offered by Eiki, but is still one of the very popular projectors.



3 x 0,99" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector 5000 / 4050 Normal / 3600 im Eco Mode
Contrast 1000:1 full on/off
Black Level 5,0000 min. Lumen
Lens shift Vert.: +50% -0% Hori.: +/-15% motorisiert
Resolution XGA 1024 x 768
Video Modes 786.432 Pixel
UXGA 1600 x 1200 compressed
Application PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source 330W NSH Lamp
Article Nr.: 610 335 8093
Light Life 2000 h. 3000 h. in Eco Mode
Operating Costs -

Screen 1667 Lux (bei 200 cm Screen)
1000:1 full on/off
1,672 min. Lumen

Vert.: +50% -0% Hori.: +/-15% motorisiert
XGA 1024 x 768

786.432 Pixel
UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

330W NSH Lamp

Article Nr.: 610 335 8093

2000 h. 3000 h. in Eco Mode

-

Manual

Manual 1,3

F=1,7-2,1 f=33-43 mm / L optional

1,64-2,14:1

1W Stereo

DVI-D mit HDCP in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch Video in
RS232C Din 8pin in
USB Typ B





Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
500W in Eco Mode
348 x 156,5 x 444 mm (13,7"x6,2"x17,5") 24,1 L/dm³
35dB

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

8,90 kg / 19,62 lbs.
Vert.: +/-40°
90%
H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 100 MHz
155 fL / max. 616 cm screen width
531 cd/m²


Features

- Lens shift Funktion motorisiert
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with laser pointer und mouse control
- PJLink™
- Optional LAN network compatible.
- Digital Zoom.
- Automatic air pollution display.
- Vertical operation possible (up to 90°).
- De-interlacer with 3:2 2:2 pull down.

Optional

- Bulb only NLMP18140
- Lamp ruby Ruby-LMP18140
- Lamp original 610-335-8093 / LMP116 / ET-SLMP116
- Compatible lamp LMP-K18058
- Universal Remote original Fernb-uni-V3
- Air filter Alternative zu:MZ7A / 910 330 7184
- Ceiling Mount 100-120 Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18058>

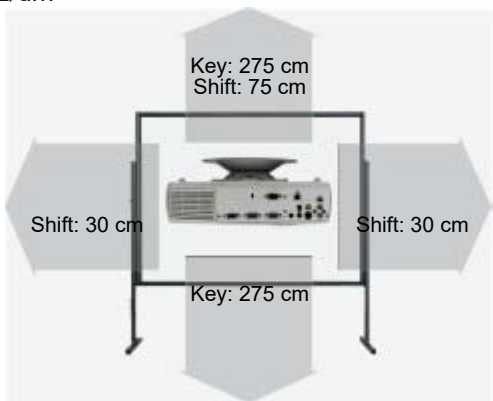

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-23661 (T11)	3.43-5.43:1	6.9-10.9 m	50%	+/-15%	Powered
AH-23541 (T10)	2.16-3.46:1	4.3-6.9 m	50%	+/-15%	Powered
AH-23511 (W10)	1.26-1.64:1	2.5-3.3 m	50%	+/-15%	Powered
Fix Optional Lenses					
AH-23631 (W11)	0.82:1	1.6 m	0.0% Fix		

Status 2007 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/eikilcxg400-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.