

Eiki LC XT1

EIKI LC XT1



A brief introduction to the LC XT1: The Eiki LCD projector offers 5000 Ansi lumens, a contrast of 700:1 and an XGA 1024 x 768 resolution. The integrated lens shift gives freedom when positioning the projector. 5000 Ansi lumens ensure that a picture width of 616 cm is also possible. The projector creates rooms with residual light with a smaller image width, max. 411 cm is recommended. It was launched in 2002 and is no longer offered by the manufacturer Eiki, but is still one of the most popular projectors.

Brief Introduction

Beta 2.5

Display Type



3 x 1,8" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

5000

1618 Lux (bei 203 cm Screen)

Contrast

700:1 full on/off

700:1 full on/off

Black Level

7,1429 min. Lumen

2.322 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

4 x 150W UHP Lamp

Articel Nr.: 610 284 4627

Light Life

1000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

3 x 3W

Connections

4 mal Cinch Audio in 1 x Aus.

DVi in

USB in

Maus Controller

D-sub 15pin in Aus.

S Video Eingang

Mini Jack

3 x RS 232 Controller

Mini Jack in



Ceiling Mounting

Power

Size WxHxD

Operating Noise

Anschlüsse Bild

Yes

670W

250 x 581 x 792 mm (9,8"x22,9"x31,2") 115,04 L/dm³

40dB

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

35,50 kg / 78,26 lbs.

Vert.: +/-30°

90%

H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 230 MHz

150 fL / max. 616 cm screen width
514 cd/m²

Features

■ Lens shift Funktion

■ Freeze

■ Remote control with laser pointer und mouse control

■ digital zoom

Optional

Bulb only

Lamp ruby

Lamp original

Compatible lamp

Universal Remote original

Air filter compatible

Air filter original

NLMP3399

Ruby-LMP3399

610-284-4627 / LMP29 / ET-SLMP29

LMP-K1400

Fernb-uni-V3

Alternative zu:MT8A / 910 301 4815

MT8A / 910 301 4815



Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n1400>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Eiki AH-32601 (W06)	1.24-1.57:1	2.5-3.2 m	+/-40%	+/-10%	Powered
Eiki AH-32581 (T03)	6.12-8.89:1	12.4-18 m	+/-40%	+/-10%	Manual
Eiki AH-32401 (W04)	1.59-2.08:1	3.2-4.2 m	+/-40%	+/-10%	Powered
Eiki AH-22051 (S03)	2.63-3.56:1	5.3-7.2 m	+/-40%	+/-10%	Powered
Eiki AH-21202 (W02Z)	1.42-1.84:1	2.9-3.7 m	+/-40%	+/-10%	Powered
Eiki AH-21102 (S02Z)	2.05-2.65:1	4.2-5.4 m	+/-50%	+/-10%	Powered
Eiki AH-21091 (T02)	4.29-6:1	8.7-12.2 m	+/-40%	+/-10%	Powered
Eiki AH-21022 (M01Z)	3.38-4.39:1	6.9-8.9 m	+/-40%	+/-10%	Powered
Eiki 0001-4231	3.14-5.02:1	6.4-10.2 m	+/-40%	+/-10%	Manual
Eiki 0001-4228	5.09-8.48:1	10.3-17.2 m	+/-40%	+/-10%	Manual
Fix Optional Lenses					
Eiki AH-32021 (W03)	0.81:1	1.6 m	0.0% Fix		No Zoom
Eiki AH-21032 (T01Z)	6.89:1	14 m	+/-40%	+/-10%	No Zoom
Eiki AH-21012 (W01Z)	1.21:1	2.5 m	+/-40%	+/-10%	No Zoom
Eiki 0001-4240	9.65:1	19.6 m	+/-40%	+/-10%	No Zoom
Eiki 0001-4226	1.45:1	2.9 m	0.0% Fix		No Zoom
Eiki 0001-4225	1.21:1	2.5 m	0.0% Fix		No Zoom

Status

2002 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

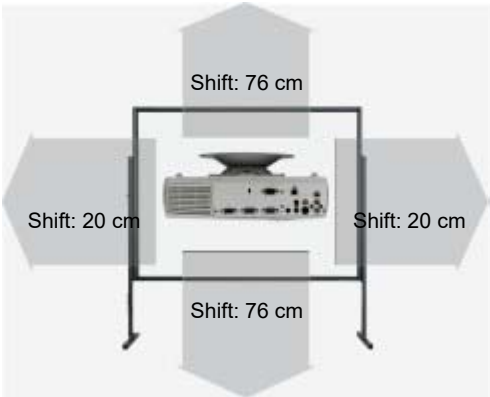



HCinema

<https://www.projector-database.com/pro/eikilcxt1-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.