

Eiki Pro V2200

EIKI PRO V2200



The Eiki Pro V2200 model is an LCD laser projector with WUXGA 1920 x 1200 resolution and a contrast of 3000000:1. The manufacturer Eiki specifies a service life of 20000 hours, which is over 13.7 years if enjoyed for four hours a day. With the lens shift function, the projector can be positioned very freely. An image width of up to 1507 cm is possible, if the image width is smaller (we recommend max. 1005 cm), rooms with residual light are also no problem. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Furthermore, the projector can play 1080P and 4K (compressed) without any problems and can even project Blu-rays onto the ceiling using 360° projection.

 3 x 1,0" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

22000

3000000:1 full on/off

0,0073 min. Lumen

Vert.: +/-65% Hori.: +/-25%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K2K) 3840 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laser Phosphor

20000 h.

0,00 € Laser

Powered

Powered

optional

optional

-

HDMI In

HDBaseT In

3G-SDI In

DVI-D In

VGA In

Yes, is possible.

1155W Max. / 1000W Normal


600 x 245 x 503 mm (23,6"x9,6"x19,8") 73,94 L/dm³

46 / 41 dB in Eco Mode

9778 Lux (200 cm Screen width)

3000000:1 full on/off

0,003 min. Lumen

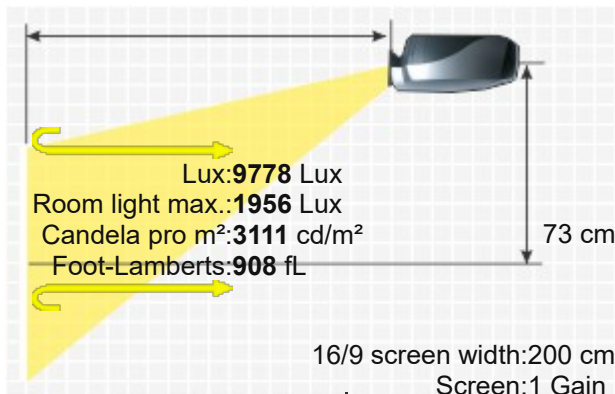


Weight 29,00 kg / 63,93 lbs.
Keystone Vert.: +/-30° automatisch
Illumination Hori.: +/-30°
80%
Frequenz H-sync: 15-100 kHz
V-sync: 24-85 Hz

Foot-Lamberts 908 fL / max. 1507 cm screen width
3111 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Warping
- 360° installable
- Edge Blending
- Password protection
- Control via web browser
- Lan network compatible.
- DICOM

Features

Screen Mirroring -

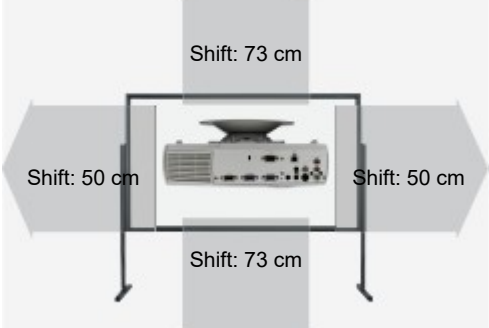

Optional accessories

	Deckenhalterung Länge 225 mm	Halterung45	85,80 €
---	------------------------------	-------------	---------

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-AV24010	1.98-3.95:1	4-7.9 m	+/-65%	+/-25%	Powered
AH-AV22070	0.64-0.86:1	1.3-1.7 m	+/-55%	+/-20%	Powered
AH-AV22060	0.53-0.65:1	1.1-1.3 m	+/-50%	+/-20%	Powered
AH-AV21030	1.24-2.01:1	2.5-4 m	+/-65%	+/-25%	Powered
AH-AV21020	0.86-1.25:1	1.7-2.5 m	+/-65%	+/-25%	Powered

Status 2024 Current model // Last update of the data: 2025-09-09
Created: 2024-07-17 09:22:28

Data



More Details



HCinema

<https://www.projector-database.com/pro/eikiprov2200-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.