

Elite Video P 1400

ELITE VIDEO P 1400



Brief Introduction

Beta 2.5

The Elite Video model P 1400 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 350:1. An image width of up to 326 cm is possible. However, the picture should be smaller in room light. We recommend max. 217 cm. It is no longer offered by the manufacturer Elite Video.

Display Type



3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector 1400

Screen 453 Lux (bei 203 cm Screen)

Contrast

350:1 full on/off

350:1 full on/off

Black Level

4,0000 min. Lumen

1.306 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

NTSC, NTSC 4,43 PAL, SECAM

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Small screen width, rooms with very little ambient light below 100 lumens.
120W UHP Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,17

Objective

F=1,8-2,1

Throw Ratio

-

Audio

2 x 1W

Connections

(1) RCA Phono
Input (2) 15-pin HD sub D
S-Video (1) 4-pin DIN
Output: Audio
(2) RCA R/L
Composite (1) RCA Phono
RGB (1) 15-pin HD sub D
RCA R/L
RS232C

Ceiling Mounting

Yes

Power

210W

Size WxHxD

392 x 292 x 163 mm (15,4"x11,5"x6,4") 18,66 L/dm³

Operating Noise

-

Weight

6,90 kg / 15,21 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15-91 kHz

V-sync: 50-90 Hz

Foot-Lamberts

42 fL / max. 326 cm screen width

144 cd/m²


Features

-

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

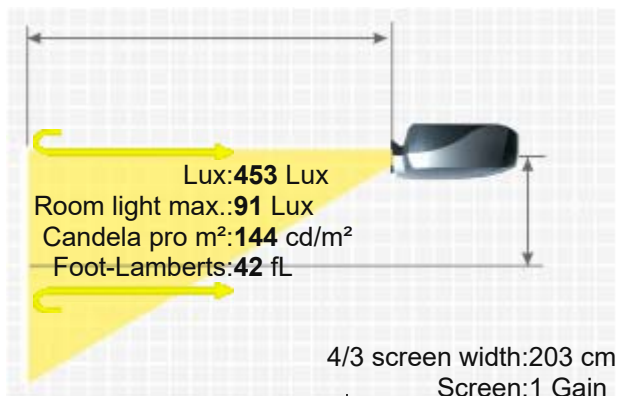



HCinema

<https://www.projector-database.com/pro/elitevideop1400-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.