

ELMO

EDP-S50

LCD DATA PROJECTOR



New Presentation Power with 2000 ANSI lumens output!
The ELMO EDP-S50 is the ultra-portable multimedia Data Projector of SVGA resolution, packing all the essential features in the 2.7kgs tiny body. Ideal machine for small-room powerful presentation thanks to its short-throw optical design and 150W UHB lamp.

- Bright display at 2000 ANSI lumens
- SVGA (800x600 native) plus compressed XGA, SXGA, UXGA resolution
- Excellent video quality and faithful color reproduction
- Only 2.7kgs in weight, slim and compact body
- Short-throw lens (60" screen projection at 1.8m distance)
- 34dB Low noise operation (at whisper mode)
- 1.2x optical zoom plus 4x digital zoom
- Digital keystone correction(H&V)
- HDTV compatible
- Illuminated operation buttons
- Mirror reverse & Up-side downimages
- Freeze and magnify functions

ELMO

Visualizing technology since 1921


LCD DATA PROJECTOR EDP-S50

SPECIFICATIONS


Power	Power source	AC100-120V/220-240V,50/60Hz
	Power consumption	240W
Optical	LCD panel	0.7-inch polysilicon active matrix TFT x3
	Number of pixels	800(H) x 600(V) x3
	Resolution	RGB:800 x 600 dots
	Light source	150W UHB lamp(DT00511)
	Brightness	2000 ANSI lumens
	Lens	F1.7-1.9, f=21.7-26.1mm
	Zoom	Manual (1.2x)
	Focus	Manual
	Image size	30 to 300 inches diagonal
	Projection distance	0.9m to 9.0m (2.9' to 29.8')
	Keystone correction	Digital (H&V)
General	Computer compatibility	IBM Compatible VGA, SVGA, XGA, SXGA (Smart resizing), UXGA Capability MAC 13",MAC 16"(Pixelworks Chip)
	Video compatibility	NTSC, NTSC 4.43, PAL(-BGDHI),SECAM,PAL-M,PAL-N,PAL-60, HDTV(480i,575i,480p,1080i,720p)
	Noise	34dB at whisper mode (39dB at normal mode)
	Speaker	1.0W x1(monaural)
In/out terminals	RGB input	D-sub 15P x2
	Video input	Composite video: RCA jack x1 S-Video: Mini-Din 4P x1 Component video: Accessory component video cable
	Audio input	RCA jack (L,R) x1
	RGB monitor output	D-sub 15P x1
	Control	D-sub 15P x1 for RS-232C,USBx1 for Mouse control
Others	Supplied accessories	Remote control,RGB cable,AV cable,USB mouse cable, Power cords, Soft carrying case,User's manual
	Dimensions	295x76x231mm (11.6"x3.0"x9.1") (excluding feet and extrusions)
	Weight	2.7 kgs (6.0 lbs)

Note :Weight and dimensions are approximate.
Design and specifications are subject to change without prior notice.

PROFILE

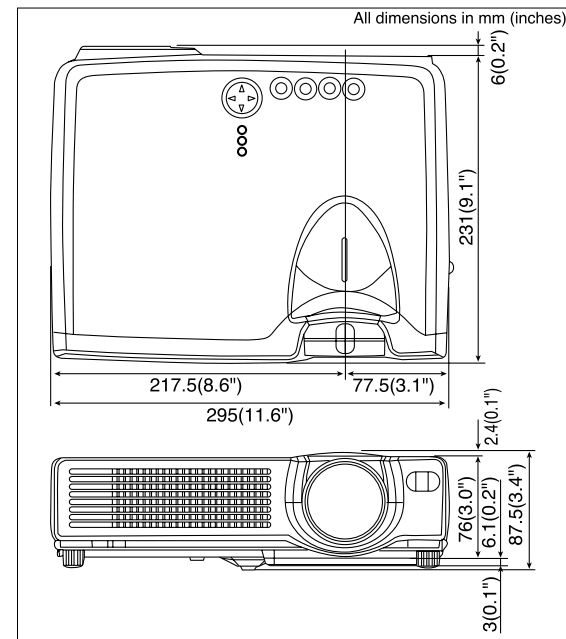


PROJECTION DISTANCE AND SCREEN SIZE (4:3 aspect ratio)

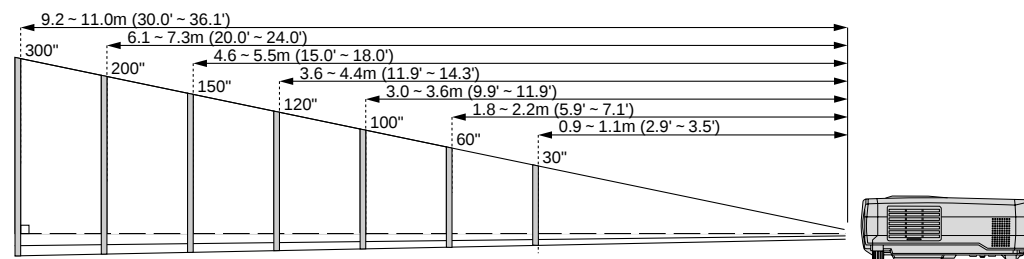

Other ELMOs to give your presentations amazing diversity!



High Resolution Visual Presenter, HV-3500XG
XGA resolution of 1/3" 850,000 pixels progressive-scan CCD

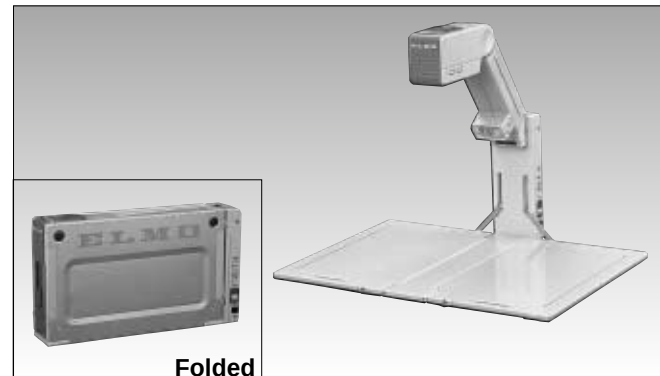

High Resolution Mobile Presenter, HV-100XG
XGA resolution of 1/3" 850,000 pixels progressive-scan CCD

ELMO and **ELMO** are trademarks and/or registered trademarks of ELMO COMPANY,LIMITED.

ELMO ELMO CO., LTD.

6-14, Meizen-cho,Mizuho-ku,
Nagoya,467-8567,Japan
E-Mail:foreign-div@elmo.co.jp
Tel. 81-52-821-3141 Fax. 81-52-811-5243

Additional technical information is available from any of the following subsidiary companies;

Elmo (Europe) G.m.b.H.

Neanderstr. 18,
40233 Düsseldorf, Germany
Tel. 0211-376051-53 Fax. 0211-376630
E-mail:elmo@elmo.de
Web: <http://www.elmo.de/>

Elmo Mfg. Corp.

1478 Old Country Road,
Plainview, NY 11803-5034, U.S.A.
Tel. 516-501-1400 Fax. 516-501-0429
E-mail:elmo@elmousa.com
Web: <http://www.elmousa.com>

Elmo Canada Mfg. Corp.

44 West Drive, Brampton,
Ontario, L6T 3T6, Canada
Tel. 905-453-7880 Fax. 905-453-2391
E-mail:info@elmocanada.com
Web: <http://www.elmocanada.com>



Printed on recycled paper with SOYINK
Printed in Japan(A)11/2003