

Epson BrightLink 780Ei

EPSON BRIGHTLINK 780Ei



Brief overview of the Epson BrightLink 780Ei. This short-throw LCD laser projector features an HDTV resolution of 1920 x 1080 and a contrast ratio of 5,000,000:1. Thanks to its laser technology, the projector has a rated lamp life of 30,000 hours?which, at four hours, that?s over 20.5 years. Horizontal and vertical keystone correction makes image setup a breeze. With a throw ratio of just 0.25:1, this projector never gets in the way. To project a 2-meter-wide image, the projector needs to be positioned just 50 cm away from the screen. The projector supports AirPlay and Miracast screen mirroring, allowing you to stream high-resolution videos and surround sound directly from smartphones, tablets, and PCs running Android, Windows, or iOS via Wi-Fi. It is also compatible with Full HD 1080p and 4K (compressed). Compared to other projectors, it is very quiet, with an operating noise level of 30 decibels.

 3 x Epson Poly-Silicon TFT Active Matrix LCD Panel
HDTV 16/9 Liquid Crystal Display

Projector	4200	Screen	1867 Lux (200 cm Screen width)
Contrast	5000000:1		5000000:1
Black Level Offset	0,0008 min. Lumen		0 min. Lumen

HDTV 1920 x 1080

2.073.600 Pixel

UHD (4K2K) 3840 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

DVD | HD Blu-ray | 3D-Blu-ray | 4K UHD Blu-ray (60p) (komprimiert)

Short Distance | Wide screen width or rooms with plenty of light (over 200 lumens).

Laser

30000 h.

0,00 € Laser

Manual


Manual 1,4

F=1,6 f=3,7mm

0,25-0,35:1

16W Mono

3x HDMI (with HDCP 2.3 protection) in
HDMI (with HDCP 2.3 protection) out
Audio Mini Jack in und out
2x USB-B (1 Interactivity; 1 service)
2x USB-A (USB memory/ document camera) (5V/2A)

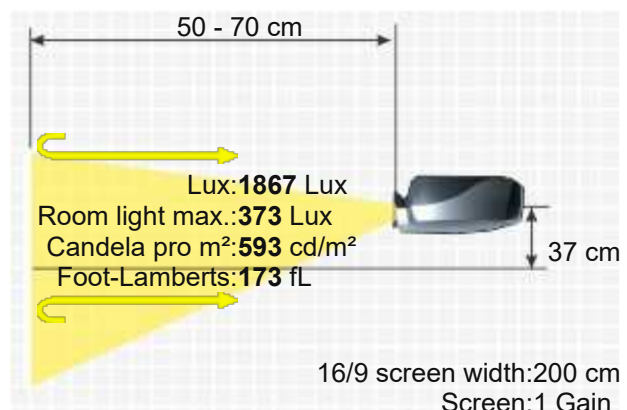

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Disc Recognition

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

RJ45 Lan
RS-232C
Interactive Synchronization: 1x Mini Stereo In
Interactive Synchronization: 1x Mini Stereo Out
Touch Unit Connection Port: 1x



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
270W Normal / 213W Eco
375,9 x 172,7 x 396,2 mm (14,8"x6,8"x15,6") 25,54 L/dm³
30 / 27 dB in Eco Mode

Weight
Keystone
Illumination

7,03 kg / 15,43 lbs.
Vert.: +/-3°
Hori.: +/-3°
-

Frequenz

-


Foot-Lamberts

173 fL / max. 564 cm screen width
593 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Wi-Fi network compatible.
- Short-throw projector
- Interactive Display (Pen ELPPN07)
- OS-agnostic UX (Google Workspace? or Microsoft 365?)
- Epson Classroom Connect
- Epson Setting Assistant app
- NFC (copying and transferring projector settings)
- Epson Projector Management (Fleet Management)
- 21:9 Mode
- Split Screen (up to 2 screens)

Screen Mirroring

Miracast, Airplay, Windows, Epson Classroom Connect

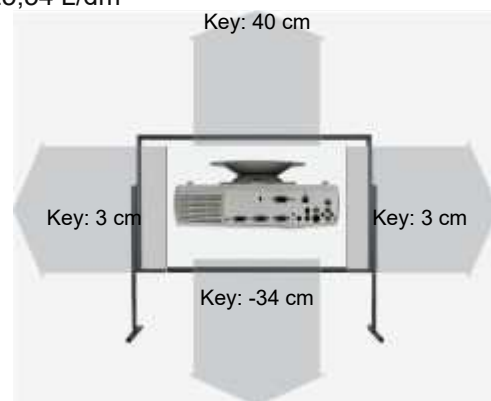

Optional accessories



Deckenhalterung Länge 100-120 mm

Halterung100

47,86 €

Status

2026 Current model // Last update of the data: 2026-06-29
Created: 2026-06-10 11:56:31

Data



More Details



HCinema

<https://www.projector-database.com/pro/epsonbrightlink780ei-en.html>